AUSTRALIA - NTWC TRAINING

From: **Yuelong Miao** <yuelong.miao@bom.gov.au> Date: Mon, Jul 31, 2023 at 12:02 AM Subject: Australia TWC training - NTWC Competency Framework [SEC=OFFICIAL] To: Laura Kong - NOAA Federal <laura.kong@noaa.gov>

Hi Laura,

I hope useful the attached Tsunami Competency Framework (also known as the Training Package) for performing the Bureau side of the JATWC operations. For completeness, I also attached three documents that were referenced in that Framework.

In short, at the Bureau of Meteorology for the Joint Australian Tsunami Warning Centre (JATWC), i.e., not including our partner Geoscience Australia's key JATWC function and process in earthquake detection and analysis.

- Profile of staff background, experience for the staff you hire (degrees, topic, etc) Meteorologists. However I don't think this meteorologist is a must have qualification for performing tsunami warning, but science degree/diploma is a minimum requirement.
- Length of NTWC training before they are 'live' Up to 1 week training efforts inclusive of training and assessment activities. Shorter period needed if prior knowledge/experience/competency.
- 3. Syllabus of Training topic, length, how to assure ready (tests, practicum, or ?), medium used for training (live, offline software, observer, hands-on, classroom, online, etc)
 - Three areas of competency to gain system, science and process.
 - Role-based training requirements thus various combination of these three areas in complexity. E.g., some don't need system competency at all, some needs only basic tsunami knowledge, and some only needs process of liaison fi doing customer decision support.
 - Assessment is required, but it could take a variety of forms depending on what's being assessed. E.g., online quiz may be sufficient to assess knowledge, while for warning production process, workplace observation is needed.
 - Relying on online modules as much as possible to enable flexibility and efficiency, noting that online modules can be highly complex and interactive including their allowing video-recorded evidence for assessment.
- 4. National Certification do you have

a formal certification, or not? Yes. Role based formal certification recorded in the same human resource management system.

how long? 3-year validity for waring production roles, 5-year for customer decision support roles. To maintain currency, also need evidence of annual refresher activities such as participating in an exercise, redoing online modules or issuing warnings in a real event.

how to re-certify? Upon expiry, one has to go through the same training and assessment as the maiden certification to be recertified. The training period is of course shortened due to familiarity of knowledge and process.

Regards,

Yuelong Co-Director JATWC


Yuelong Miao (he/him)

Team Lead, Tsunami Marine and Coastal Hazards Environmental Prediction Services Program, Community Services Group Level 6, 700 Collins Street, Docklands, VIC 3008 m: +61 423 483 295 | www.bom.gov.au



Tsunami Training Package

Tsunami Competency

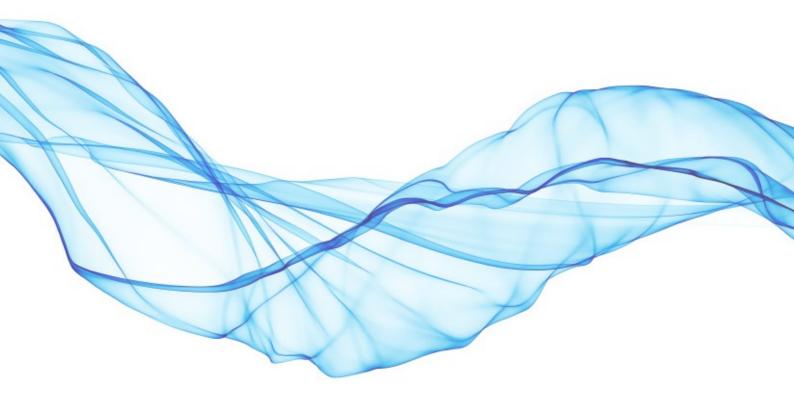

Version Control

Version	Date	Author(s)	Comments
0.1	30/6/14		
1.0	31/7/14		
1.1	23/3/15	omitted for privacy	purpose
1.2	6/5/15		
1.3	11/5/15		
1.6	16/09/20		

Document Owner

This document is owned by SRTD as the supervisor of the National Forecaster Development Group in the Bureau of Meteorology Training Centre. Contact xxxx for more information or to report errors.

Review Cycle

This training package will be reviewed by the Tsunami Trainer at least every two years. This will include a review of associated units of competency as required by the individual unit. Any proposed changes will be raised with relevant stakeholders (NPS, EPS, DSS and Aviation) and approval of changes will be required as described below.


Approval

This training package and associated units of competency must be approved by SRTD and SRTW signature

Signature section omitted for privacy purpose

Training & Assessment Overview

Tsunami training is developed based on a training needs analysis and to support trainees in achieving competency where defined. Not all training will necessarily be assessed and hence lead to a qualification. Training will be developed with careful consideration of the target audience to ensure the scope of activities match the requirements.

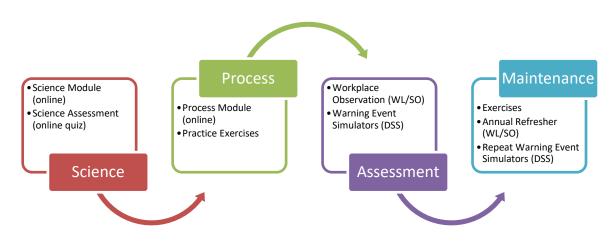

The following learning pathway broadly defines the key knowledge and skill development steps.

The science module is common to all forecaster roles, with JATWC Tsunami Warning Lead and Science Officer roles exploring a few additional concepts with respect to modelling. Completion of a quiz satisfies the assessment requirements for this phase. Other identified Decision Support staff such as corporate communications staff and Hazard Preparedness and Response (HPR) management may also complete the science training module but may not be required to complete the science quiz. Simplified science training may also be delivered to specific audiences such as the Comms Officer role.

The process training provides relevant information regarding the SOPs and supports learners through tsunami lessons. Separate online training courses have been created to suit production and decision support roles. Participation in tsunami exercises may also support skill development during this phase. IT staff who fill comms officer roles in tsunami events will receive process training but may not require assessment. Other identified staff who may be involved in tsunami events at a peripheral level may complete relevant sections of the process training but may not require assessment.


The assessment phase is conducted via workplace observation for the JATWC Tsunami Warning Lead and Science Officer roles. Online Warning Event Simulators meet the assessment requirements for Decision Support roles.

Skill maintenance will be achieved through ongoing participation in tsunami exercises, annual refresher training activities (for Warning Lead and Science Officer) and repeating Warning Event Simulators for Decision Support staff.

New staff with responsibility for any role must complete the training and assessment program and achieve the required competency prior to going solo.

Competency Framework Overview

The tsunami competency framework is stratified as shown in the image below, with increasing complexity in each subordinate level:



Qualifications map to job families/functions within the Bureau and must be held by staff performing those duties. Qualifications are awarded after successfully demonstrating competency in the required units. Each unit of competency is defined in a separate document, including competency elements performance criteria definitions and an evidence guide.


Qualification Requirements

The following table outlines the units of competency required for each qualification:

Staff Position	Qualification Required	Units of Competency Required
National Production	JATWC Warning Lead	TsuSciA – Tsunami Science (Level A)
EL2Ls and EL1s,		TsuProA – Tsunami Warning Process (Level A)
Marine and Antarctic		TsuSysA – Tsunami Systems (Level A)
EPS staff		
National Production,	JATWC Science Officer	TsuSciA – Tsunami Science (Level A)
Aviation Hazardous		TsuProB – Tsunami Warning Process (Level B)
Weather Unit and		TsuSysA – Tsunami Systems (Level A)
Marine and Antarctic		
EPS staff		
IT Ops Desk staff	JATWC Comms Officer	TsuProC – Tsunami Warning Process (Level C)
		TsuSysB – Tsunami Systems (Level B)
HPR Managers and	Tsunami Operations	TsuSciB – Tsunami Science (Level B)
EL1s, emergency	Decision Support	TsuProD – Tsunami Warning Process (Level D)
services out-posted		
meteorologists		
DMSU forecasters	DMSU Tsunami	TsuSciB – Tsunami Science (Level B)
	Operations	TsuProD – Tsunami Warning Process (Level D)

Note: Only the Tsunami Systems (Level A) competency has been defined and supported with training and assessment resources. The Tsunami Warning Process (Level C) is not yet defined and no training or assessment resources have been created to support this competency. These units of competency are included above for completeness.

The following image shows the qualifications (blue boxes) and required units of competency for those qualifications.

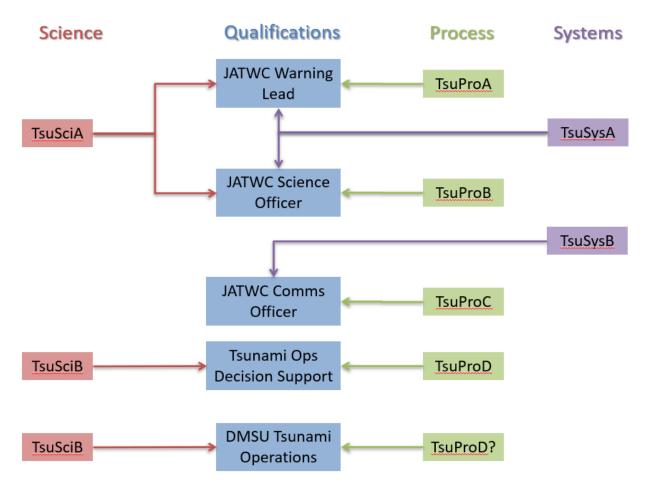

Qualifications may be awarded to additional staff or staff at other levels subject to job function requirements and availability of training and assessment resources to support this. Staff wishing to pursue qualifications they don't require to perform their role must be identified through the Performance Development Scheme and are subject to approval of SRTD.

Qualification Validity

Qualifications will be recorded in the Enterprise Business System (EBS). Qualifications will expire after either one year (continuous) out of the appropriate operational role or after the period of time outlined in the table below:

Qualification	Validity Period
JATWC Warning Lead	3 years
JATWC Science Officer	5 years
JATWC Comms Officer	5 years
Tsunami Operations Decision Support	5 years
DMSU Tsunami Operations	5 years

These are <u>maximum</u> validity periods. As indicated in the learning pathway, staff will be supported to maintain their skills through repeating training modules, warning event simulators, exercises and refresher training campaigns as specified at the regional level.

Tsunami Training Package

Qualification Management

Staff may complete additional tsunami training activities or competency updates between official reassessment requirements outlined in the qualification validity table above. Updates to individual units of competency will not translate to a full qualification update unless all relevant units of competency for a particular qualification are all completed within 12 months of each other.

Glossary

BMTC	Bureau of Meteorology Training Centre
DSS	Decision Support Services
DMSU	Defence Meteorological Support Unit
HPR	Hazard Preparedness and Response
DST	Decision Support Tool
EBS	Enterprise Business System
ΙΤΟ	Information Technology Officer
JATWC	Joint Australian Tsunami Warning Centre
PO2	Professional Officer (Class 2)
RFC	Regional Forecasting Centre
SPOC	Senior Professional Officer (Class C)
SRTD	Supervisor Training & Development
Resources	

BMTC Tsunami Training Page - <u>https://bom365.sharepoint.com/sites/BMTCNFD/SitePages/Tsunami-</u> <u>Competency.aspx</u>

Tsunami Science Module - https://learn.bom.gov.au/course/view.php?id=760

Decision Support Tsunami Warning Process Module - https://learn.bom.gov.au/course/view.php?id=761


SOPs - <u>http://web.bom.gov.au/nmoc/srco/Tsunami/</u>

Warning Lead/Science Officer Tsunami Warning Process Module https://learn.bom.gov.au/course/view.php?id=764



Tsunami Science (Level A)

Tsunami Competency – Unit TsuSciA

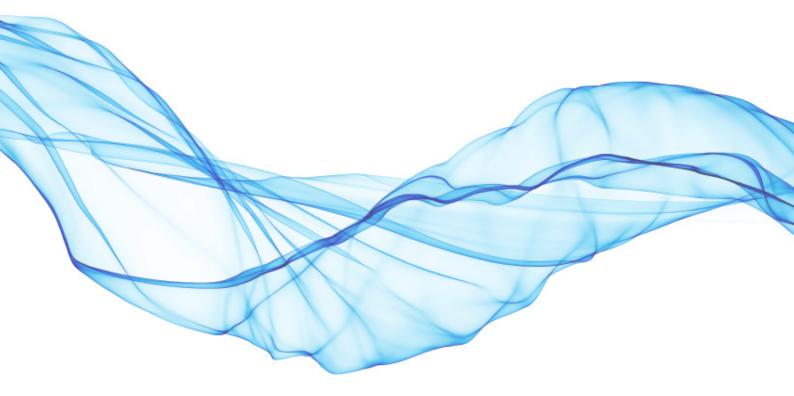

Version Control

Omitted for privacy purpose

Document Owner

This document is owned by SRTD as the supervisor of the National Forecaster Development Group in the Bureau of Meteorology Training Centre. Contact <u>xxx</u> for more information or to report errors.

Pre-Requisites Nil.

Job Function Requirements

This unit of competency must be held by all BNOC duty forecasters (SPOC & PO2) as described in the Tsunami Training Package.

Review Cycle

This unit of competency will be reviewed by the Tsunami Trainer at least every two years. Any proposed changes will be raised with relevant stakeholders (services, training and affected operational offices) and approval of changes will be required as described below.

Approval

This unit of competency must be approved by SRTD and SRTW signature

Omitted for privacy purpose

Elements and Performance Criteria

1. Explain tsunami generation	 1.1 List the known causes of tsunamis 1.2 Describe how undersea earthquakes along fault lines cause tsunamis 1.3 Describe the three fault line types and where each type is found around Australia 1.4 Name the three rupture types and identify which types are tsunamigenic 1.5 Explain the difference between hypocentre and epicentre 1.6 Explain why a magnitude difference of 1 corresponds to an energy release difference of 32 times 1.7 Describe how earthquake intensity is determined and why it is useful 1.8 Explain how earthquake depth affects the potential for tsunamis to be generated
2. Explain	2.1 Explain why tsunamis travel as shallow water waves and describe the relationship
tsunami	between wave speed and water depth
propagation	2.2 Describe the process and causes of tsunami attenuation2.3 Identify the location of Australia's tsunameters
	2.4 Explain how tsunameters measure tsunamis, including the sampling frequency
	2.5 Access tsunameter data and correctly identify important features this data displays, especially the tsunami signal
	2.6 Determine tsunami amplitude and period from tsunameter observations2.7 Outline the key characteristics of the MOST T2 model
	2.8 Explain how magnitude, rupture length, rupture width and slip are related in MOST T2 model scenarios
	2.9 Explain what Maximum Wave Amplitude (MWA) Plots convey, how they may be used and limitations
	2.10 Describe how MOST T2 model scenarios are selected
	2.11 Outline how MOST T2 scenarios are scaled to provide information for intermediate magnitude
	2.12 Explain what envelope plots represent
	2.13 Demonstrate how envelope plots can be used to determine an effective
	earthquake magnitude based on observed tsunami amplitude
	2.14 Describe how tsunami ETA is determined for Australia, in particular the rounding applied to output
	2.15 Describe how tsunami ETA is determined for Indian Ocean CFPs
3. Explain tsunami impacts	3.1 Describe how tsunami wavelength, amplitude and speed change when transitioning into shallow water
	3.2 Identify the order of magnitude of tsunami properties in deep and shallow water in terms of speed, amplitude, wavelength and period
	3.3 Describe the difference between crest-first and tough-first tsunamis in terms of generation and coastal impact
	 3.4 Describe how inundation is affected by bathymetry, coastal properties and tides 3.5 Explain run-up, including the difficulties in forecasting the extent of tsunami run-up 3.6 Describe the ATWS threat levels and explain how they were determined 3.7 Explain how IOTWS threat level is determined 3.8 Describe the products issued by JATWC 3.9 Explain how sea-level gauges measure tsunamis
	3.10 Interpret sea-level data to measure tsunami amplitude 3.11 Outline the limitations of sea-level gauges
	3.12 Describe how sea-level observations may be dampened or amplified

Evidence Guide

Evidence of competency in performance criteria may be collected through assessment tools as summarised in the following table:

Performance	Quiz	Interview	Observation	Portfolio	3 rd Party
Criteria					Report
1.1	Х				
1.2	Х	Х			
1.3	Х				
1.4	Х				
1.5	Х				
1.6		Х			
1.7		Х			
1.8	Х				
2.1	Х				
2.2	Х				
2.3		Х	Х		
2.4	Х				
2.5			Х		
2.6	Х		Х		
2.7	Х	Х			
2.8	Х				
2.9	Х	Х	Х		
2.10	Х	Х			
2.11	Х	Х			
2.12	Х		Х		
2.13	Х		Х		
2.14	Х		Х		
2.15	Х		Х		
3.1	Х	Х			
3.2	Х				
3.3		Х			
3.4	Х				
3.5	Х				
3.6	Х	Х	Х		
3.7	Х	Х	Х		
3.8		Х	Х		
3.9		Х			
3.10	Х		Х		
3.11	Х	Х			
3.12	Х	Х			

Definitions

Quiz: an online series of questions, generally automatically marked

Interview: questions asked by the assessor in person

Observation: a workplace observation, either simulated or real

<u>Portfolio</u>: a collection of evidence prepared by the candidate for assessment

<u> 3^{rd} Party Report</u>: a written endorsement of the candidates ability to perform the task by a 3^{rd} party

Underpinning Skills/knowledge

All underpinning knowledge required to achieve competency in this unit are contained within the Tsunami Science Module on Latitude (see resources)

Glossary

ATWS	Australian Tsunami Warning System
BNOC	Bureau of Meteorology National Operations Centre
CFP	Coastal Forecast Point (IOTWS)
ETA	Estimated Time of Arrival
IOTWS	Indian Ocean Tsunami Warning & Mitigation System
JATWC	Joint Australian Tsunami Warning Centre
MOST T2	Method of Splitting Tsunamis (version T2)
MWA	Maximum Wave Amplitude
SOP	Standard Operating Procedures
Tsunameter	Deep Ocean Sea-Level Detection Buoy
TTT	Tsunami Travel Time

Resources


Tsunami Science Module on Latitude - <u>http://latitude.bom.gov.au/course/view.php?id=260</u>

BNOC SOPs - <u>http://web.bom.gov.au/nmoc/srco/Tsunami/</u>



Tsunami Warning Process (Level A)

Tsunami Competency – Unit TsuProA

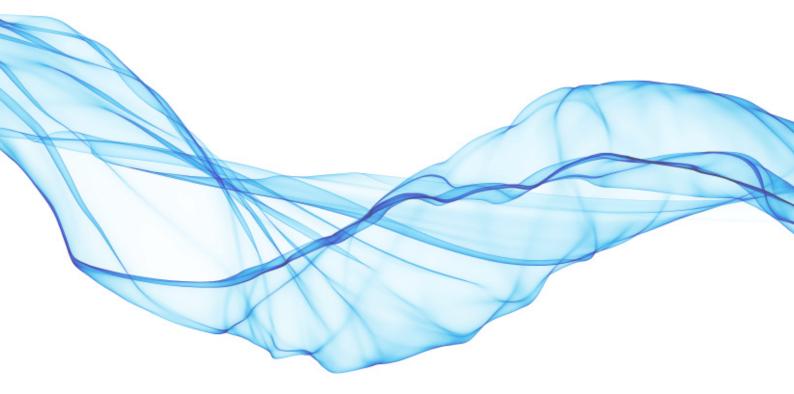

Version Control

Omitted for privacy purpose

Document Owner

This document is owned by SRTD as the supervisor of the National Forecaster Development Group in the Bureau of Meteorology Training Centre. Contact <u>xxx</u> for more information or to report errors.

Pre-Requisites

TsuSciA – Tsunami Science (Level A) TsuSysA – Tsunami Systems (Level A)

Job Function Requirements

This unit of competency must be held by the BNOC senior duty forecaster (SPOC) as described in the Tsunami Training Package.

Review Cycle

This unit of competency will be reviewed by the Tsunami Trainer at least every two years. Any proposed changes will be raised with relevant stakeholders (services, training and affected operational offices) and approval of changes will be required as described below.

Approval

This unit of competency must be approved by SRTD and SRTW signature

Omitted for privacy purpose

Elements and Performance Criteria

1. Perform tsunami threat assessment & determine course of action	 1.1 Load seismic manual solution in discussion with GA 1.2 Compare all available earthquake solutions, discuss uncertainties with GA and determine impacts of uncertainties on the threat assessment 1.3 Discuss volcanic eruption with GA and VAAC to obtain source details for threat assessment 1.4 Perform and interpret IOTWS threat assessment for Indian Ocean countries 1.5 Perform and interpret ATWS threat assessment for Australia and offshore territories 1.6 Determine course of action based on threat assessment and SOP guidelines, including threat reassessment leading to cancellation and finalisation 1.7 Interpret Tsunami ETA and prioritise actions accordingly 1.8 Perform and interpret ATWS and IOTWS threat assessments using the Simplified TTT Method where necessary 1.9 Assess tsunami potential from non-seismic oceanic sources 1.10 Modify threat assessment based on observations or new seismic information
2. Manage BNOC & JATWC resources for tsunami event	 2.1 Appoint JATWC roles according to event severity 2.2 Delegate JATWC tasks to appropriate staff throughout the event 2.3 Redistribute and reprioritise business-as-usual operational duties 2.4 Ensure additional staff are called in as necessary 2.5 Ensure key information and policy decisions are logged 2.6 Close event in consultation with relevant stakeholders
3. Issue and update IOTWS & ATWS products in a timely manner	 3.1 Prepare and issue relevant IOTWS products in a timely manner 3.2 Issue ATWS National Watch / No Threat Bulletin within the specified time-frame 3.3 Explain the differences between watches and warnings and the triggers for moving into warning phase 3.4 Prepare and issue Watches & Warnings in a timely manner in consultation with RFCs 3.5 Prepare and issue the National Warning Summary when required 3.6 Prepare and issue Cancellations and the National Event Summary 3.7 Confirm products have been dispatched successfully
4. Monitor, interpret and act on relevant observations	 4.1 Monitor and interpret relevant sea-level observations to confirm and verify tsunami threat 4.2 Ensure maximum positive amplitude observations are recorded in the DST in the correct format 4.3 Ensure anecdotal reports are recorded in the DST 4.4 Determine the effective earthquake magnitude based on tsunameter observations 4.5 Ensure media channels are monitored for tsunami related information 4.6 Assess the need to, then if required, manually trigger tsunameters into event mode
5. Communicate tsunami information and liaise with relevant stakeholders	 5.1 Liaise with the GA duty seismologist regarding potentially tsunamigenic events 5.2 Ensure the communication and notification protocol is invoked 5.3 Establish conference call with relevant RFCs, prioritising contact with regions under immediate threat 5.4 Liaise with relevant RFC Incident Managers regarding draft warnings and evacuation orders 5.5 Prioritise information when communicating about the tsunami event 5.6 Brief BNOC managers and other relevant stakeholders about the event

Evidence Guide

Evidence of competency in performance criteria may be collected through assessment tools as summarised in the following table:

Performance	Quiz	Interview	Observation	Portfolio	3 rd Party
Criteria					Report
1.1		Х	Х		Х
1.2	Х	Х	Х		Х
1.3		Х			Х
1.4	Х		Х		Х
1.5	Х		Х		Х
1.6	Х	Х	Х		Х
1.7	Х		Х		Х
1.8			Х		Х
1.9	Х	Х			Х
1.10		Х	Х		Х
2.1	Х	Х	Х		Х
2.2	Х	Х	Х		Х
2.3		Х	Х		Х
2.4	Х	Х			Х
2.5			Х	Х	
2.6		Х	Х		Х
3.1			Х	Х	Х
3.2			Х	Х	Х
3.3	Х	Х			
3.4	Х		Х	Х	Х
3.5	Х		Х	Х	Х
3.6			Х	Х	Х
3.7			Х		Х
4.1	Х		Х		Х
4.2			Х		Х
4.3			Х		Х
4.4	Х	Х	Х		Х
4.5		Х			X
4.6		Х	Х		Х
5.1		Х			Х
5.2	Х	Х	Х		Х
5.3	Х		Х		Х
5.4	Х		Х		Х
5.5	Х	Х	Х		Х
5.6		Х	Х		Х

Definitions

Quiz: an online series of questions, generally automatically marked

Interview: questions asked by the assessor in person

Observation: a workplace observation, either simulated or real

<u>Portfolio</u>: a collection of evidence prepared by the candidate for assessment

<u> 3^{rd} Party Report</u>: a written endorsement of the candidates ability to perform the task by a 3^{rd} party

Performance Criteria Descriptions

Performance criteria are described in more detail below, providing candidates guidance on how to demonstrate competence in each.

Performance	Description
Criteria	
1.1	By default, the GA manual solution should be used, however, in discussion with GA, an international bulletin may be used instead. The agreed seismic manual solution should be loaded into the DST. Discussions with GA should also focus on the earthquake magnitude, location, depth, tsunamigenic potential and fault type (if known). If no MOST scenario matches the event, this should be discussed with GA
1.2	International and GA bulletins should be accessed and assessed. Comparisons should focus on earthquake magnitude, location and depth. Travel times may also be compared. Uncertainties, particularly in relation to earthquake magnitude should be discussed with GA and 'what-if' assessments should be performed to determine the threat levels that may results from slight changes in magnitude
1.3	For large volcanic eruptions, GA may be able to provide seismic information upon which the threat assessment can be performed. VAAC should be consulted to determine the scale of the eruption and hence the possibility for a tsunami to be generated. By default, the Felt Earthquake No Threat Bulletin will be issued
1.4	Threat assessment based on the seismic solution or manually entered data should be performed in the DST by clicking on the IOTWS Assessment tab. As part of this initial assessment, the Earthquake Bulletin should be sent. The earthquake location should be investigated through mapping software to determine proximity to the fault line. Areas affected should be interpreted through the text list in DST or the graphical threat map. Discrepancies between IOTWS and ATWS threats for overlapping service areas should be explained
1.5	Threat assessment based on the seismic solution or manually entered data should be performed in the DST by clicking on the ATWS Assessment tab. The earthquake location should be investigated through mapping software to determine proximity to the fault line. Areas affected should be interpreted through the text list in DST or the graphical threat map. Discrepancies between IOTWS and ATWS threats for overlapping service areas should be explained. Orphaned zones should be included as directed in the SOPs
1.6	Actions include identifying the appropriate initial tsunami bulletins to send based on the threat assessment, deciding whether JATWC will need to be activated and whether to initiate a conference call with the RFCs and if so which RFCs to contact. Threat reassessment based on new seismic information or sufficient tsunami observational evidence may lead to lower threat levels and associated cancellation and finalisation of warning products
1.7	Tsunami travel time and ETA should be assessed to help prioritise actions such as contact with the RFCs and issuing warning products based on immediate threat (i.e. whether ATWS should be prioritised over IOTWS). The earliest impact on Australia should be noted for use in briefings. Tsunami ETA information should also be used to identify which observation sites to monitor and when the tsunami is expected to impact the sites.
1.8	When no MOST scenario can be found for the earthquake event, the DST will automatically use the Simplified TTT Method. This should be noted and communicated to GA. ATWS and IOTWS threat assessments, if required, should be performed in the DST on the basis of this method. The threat assessment should be related back to the method definition described in the SOPs
1.9	Unexplained sea-level observations should be assessed to determine whether the wave characteristics match those expected for a tsunami (i.e. long period, low

 amplitude in deep water, higher in shallow water). Reactionary warnings sisued in these cases as directed in the SOPs 1.10 Based on new seismic information or reliable tsunameter observations (see 4.4), modify the earthquake details and perform a threat reassessment in Threat upgrade may be based on one tsunameter, but two are required to downgrade 2.1 JATWC roles include Science Officer, Communications Officer and Media L Officer and they should be appointed as dictated by the event severity in a with the SOPs. In some cases, these roles will be filled through the initiation of the source officer. 	ee criteria the DST. o Liaison
4.4), modify the earthquake details and perform a threat reassessment in Threat upgrade may be based on one tsunameter, but two are required to downgrade2.1JATWC roles include Science Officer, Communications Officer and Media L Officer and they should be appointed as dictated by the event severity in a	the DST. o Liaison
Threat upgrade may be based on one tsunameter, but two are required to downgrade 2.1 JATWC roles include Science Officer, Communications Officer and Media L Officer and they should be appointed as dictated by the event severity in a structure of the severity in	D Liaison
downgrade 2.1 JATWC roles include Science Officer, Communications Officer and Media L Officer and they should be appointed as dictated by the event severity in a	Liaison
2.1 JATWC roles include Science Officer, Communications Officer and Media L Officer and they should be appointed as dictated by the event severity in a	
Officer and they should be appointed as dictated by the event severity in a	
, , , , , , , , , , , , , , , , , , , ,	accordance
with the SOPs. In some cases, these roles will be filled through the initiative	accordance
	ve of other
staff and in such cases as Incident Manager it is necessary to simply confir	rm the staff
are comfortable performing the role and ensure they understand what's r	required
2.2 JATWC staff should be used effectively throughout the event by delegatin	g tasks
appropriately in accordance with the SOPs	
2.3 In the absence of another qualified BNOC staff member assuming control	of
business-as-usual operations, the Incident Manager must ensure BNOC ta	isks are
redistributed and reprioritised to remaining BNOC staff as directed in the	SOPs
2.4 Additional staff required for either JATWC or BNOC should be called in by	
Incident Manager or the task delegated to another staff member to comp	
2.5 Key information such as threat reassessments, observations/reports, syste	
unrecorded phone calls or decisions should be logged by the Science Offic	cer, with
the Incident Manager responsible for ensuring this occurs	
2.6 The event should be closed at the appropriate time in accordance with the	
3.1 IOTWS Bulletins should be issued in the correct sequence and within the r	
time-frame (where possible) in accordance with the SOPs. This may include	de No
Threat, Potential Threat, Confirmed Threat and Finalisation Bulletins	
3.2 The ATWS National Watch or No Threat Bulletin should be issued on the b	
ATWS threat assessment within the required time-frame (where possible)	
accordance with the SOPs. The National Watch Bulleting must be issued b	
regional watches/warnings. Rules regarding issuing a No Threat Bulletin w	
certain ATWS areas are under threat should be understood and explained	
3.3 The purpose for, and appropriate context in which regional watches and v are issued should be understood and explained. The two triggers for movi	-
warning mode (i.e. confirmed tsunami or unconfirmed but immediate thr	
be explained and applied correctly in warning events	eat) should
3.4 Regional watches and warnings should be prepared in the DST and upload	hed for
regional approval as directed in the SOPs. Regional watches and warnings	
issued hourly or at any time the threat assessment changes. Evacuation of	
messages should be applied as directed by the relevant authorities (see 5.	
3.5 After regional watches/warnings have been issued, the National Warning	-
must be issued and include up-to-date observations and impact reports. A	
cancellations have been issued, the Final National Warning Summary mus	
3.6 Based on cancellation/finalisation guidelines described in the SOPs, appro	
cancellation and finalisation bulletins should be prepared and transmitted	-
messages may be added to these bulletins in consultation with the affected	
After the Final National Warning Summary has been issued, the National B	-
Summary must be prepared and transmitted	
3.7 After issuing any product, the external web should be checked to confirm	successful
transmission. This task may be delegated to or duplicated by the Science (
Communications Officer	
4.1 With the support of the Science Officer, sea-level observations (coastal ga	auges and
tsunameters) should be monitored continually throughout the event using	-
as a guide to prioritisation. Observations sites that record a tsunami may	-
subsequent waves of higher amplitude and must therefore be monitored	after the

	first wave. Wave properties such as period and amplitude should be assessed to determine the nature of the sea-level anomaly. Reliable reports of sea-level changes associated with the tsunami may be used to confirm the tsunami threat. Verification of the tsunami threat can be performed based on tsunameter data with the help of envelope plots or based on ASLOS coastal gauges compared to the threat level for that region. Site metadata should be used when interpreting coastal sea-level gauges to assess how the site observation may translate to impacts on the surrounding area
4.2	The maximum positive amplitude (i.e. height above mean sea-level) should be determined from observations and entered into the DST Observations table by the Science Officer in the format specified as soon as possible. If a higher amplitude wave is observed at a site, this new observation should be entered both in terms of height and time of observation
4.3	Anecdotal reports may be received from a range of sources and should be entered by the Science Officer into the Reported Tsunami Impacts form in the DST
4.4	Tsunameter observations should be interpreted in conjunction with envelope plots to determine the effective earthquake magnitude associated with the observed amplitude. If the effective earthquake magnitude falls outside the envelope, this may lead to threat reassessment (see 1.10)
4.5	Televisions in JATWC and BNOC should be turned on and monitored by the Science Officer, Communications Officer and/or Media Liaison Officer. Online news and social media should also be monitored
4.6	ATWS tsunameters expected to observe the tsunami should be triggered into event mode at an appropriate time to ensure high temporal resolution reporting of sea- level in order to resolve the tsunami signal. This task could be delegated to the Science Officer or Communications Officer
5.1	The GA duty seismologist should be consulted at the start of the event and whenever significant new information is received by either GA or BNOC. Topics requiring discussion are listed in the SOPs. Liaison will take place over the dedicated tsunami video conference equipment
5.2	Communication and notification will be performed by the Communications Officer as directed in the SOPs. Successful completion of this process should be monitored by the Incident Manager
5.3	All regions responsible for areas under threat (marine or above) should be contacted using the tsunami phone and added to a conference call. Contact may initially be made only with the region(s) under immediate threat in order to issue the relevant warnings promptly. Other regions may then be added to the conference call. When adding a region to the conference call, the time that region(s) already in the call are on hold should be minimised. The tsunami phone should be left on speaker throughout the event and the microphone muted as appropriate
5.4	Regional IMs should be informed whenever draft products are uploaded to the registered user's page. Approval should be sought before transmitting warnings unless the situation is very urgent. When requesting feedback on draft warnings, a time-frame/deadline should be communicated to the regional IM. Evacuation orders may only be applied with approval from the relevant emergency management authority via the regional IM
5.5	Communication should be succinct, prioritised, tailored and appropriately emphasised for the target audience
5.6	Briefings should be provided as requested, as time permits and in accordance with the SOPs to Bureau managers and other important stakeholders (e.g. the AGCCC)

Underpinning Skills/knowledge

- Threat level definitions for IOTWS and ATWS
- Product requirements, especially in relation to offshore and Antarctic
- TTT rounding down to the nearest 15-minute interval
- Simplified TTT Method application
- Usage of envelope plots to determine effective magnitude based on tsunameter observations
- Able to use the DST
- Able to use the video conference equipment to liaise with GA
- Able to use the tsunami phone to establish a conference call with RFCs

Glossary

ATWS	Australian Tsunami Warning System
BNOC	Bureau of Meteorology National Operations Centre
DST	Decision Support Tool
ETA	Estimated Time of Arrival
GA	Geoscience Australia
IOTWS	Indian Ocean Tsunami Warning & Mitigation System
JATWC	Joint Australian Tsunami Warning Centre
RFC	Regional Forecasting Centre
SOP	Standard Operating Procedures
SPOC	Senior Professional Officer (Class C)
Tsunameter	Deep Ocean Sea-Level Detection Buoy
TTT	Tsunami Travel Time
VAAC	Volcanic Ash Advisory Centre

Resources


BNOC Tsunami Warning Process Module on Latitude - http://latitude.bom.gov.au/course/view.php?id=57

BNOC SOPs - <u>http://web.bom.gov.au/nmoc/srco/Tsunami/</u>



Tsunami Warning Process (Level B)

Tsunami Competency – Unit TsuProB

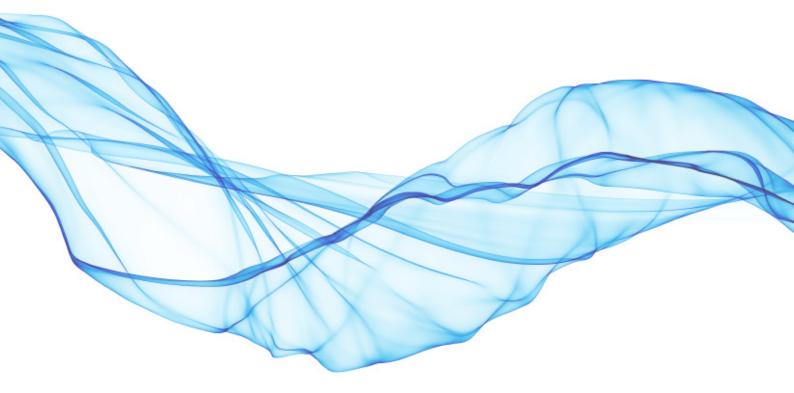

Version Control

Omitted for privacy purpose

Document Owner

This document is owned by SRTD as the supervisor of the National Forecaster Development Group in the Bureau of Meteorology Training Centre. Contact <u>xxx</u> for more information or to report errors.

Pre-Requisites

TsuSciA – Tsunami Science (Level A) TsuSysA – Tsunami Systems (Level A)

Job Function Requirements

This unit of competency must be held by the BNOC duty forecaster (PO2) as described in the Tsunami Training Package.

Review Cycle

This unit of competency will be reviewed by the Tsunami Trainer at least every two years. Any proposed changes will be raised with relevant stakeholders (services, training and affected operational offices) and approval of changes will be required as described below.

Approval

This unit of competency must be approved by SRTD and SRTW signature

Omitted for privacy purpose

Elements and Performance Criteria

1. Perform tsunami threat assessment & determine course of action	 1.1 Load seismic manual solution in discussion with GA 1.2 Compare all available earthquake solutions, discuss uncertainties with GA and determine impacts of uncertainties on the threat assessment 1.3 Discuss volcanic eruption with GA and VAAC to obtain source details for threat assessment 1.4 Perform and interpret IOTWS threat assessment for Indian Ocean countries 1.5 Perform and interpret ATWS threat assessment for Australia and offshore territories 1.6 Determine course of action based on threat assessment and SOP guidelines, including threat reassessment leading to cancellation and finalisation 1.7 Interpret Tsunami ETA and prioritise actions accordingly 1.8 Perform and interpret ATWS and IOTWS threat assessments using the Simplified TTT Method where necessary 1.9 Assess tsunami potential from non-seismic oceanic sources 1.10 Modify threat assessment based on observations or new seismic information
2. Support JATWC Incident Manager	2.1 Clarify and complete tasks delegated by the JATWC Incident Manager2.2 Log key information and policy decisions throughout the event2.3 Monitor Incident Managers actions and decisions, offering support or advice as appropriate
3. Issue and update selected IOTWS & ATWS products in a timely manner	 3.1 Prepare and issue relevant IOTWS products in a timely manner 3.2 Issue ATWS National Watch / No Threat bulletin within the specified time-frame 3.3 Explain the differences between watches and warnings and the triggers for moving into warning phase 3.4 Confirm products have been dispatched successfully and notify the Incident Manager of any problems
4. Monitor, interpret and act on relevant observations	 4.1 Monitor and interpret relevant sea-level observations to confirm and verify tsunami threat 4.2 Record maximum positive amplitude observations in the DST in the correct format 4.3 Record anecdotal reports in the DST 4.4 Determine the effective magnitude based on tsunameter observations 4.5 Monitor media channels for tsunami related information 4.6 Assess the need to, then if required, manually trigger tsunameters into event mode
5. Communicate tsunami information and liaise with relevant stakeholders	 5.1 Liaise with the GA duty seismologist regarding potentially tsunamigenic events 5.2 Prioritise information when communicating about the tsunami event 5.3 Brief BNOC managers and other relevant stakeholders about the event

Evidence Guide

Evidence of competency in performance criteria may be collected through assessment tools as summarised in the following table:

Performance	Quiz	Interview	Observation	Portfolio	3 rd Party
Criteria					Report
1.1		Х	Х		Х
1.2	Х	Х	Х		Х
1.3		Х			Х
1.4	Х		Х		Х
1.5	Х		Х		Х
1.6	Х	Х	Х		Х
1.7	Х		Х		Х
1.8			Х		Х
1.9	Х	X			Х
1.10		Х	Х		Х
2.1		Х	Х		Х
2.2			Х		Х
2.3		X	Х		Х
3.1			Х	Х	Х
3.2			Х	Х	Х
3.3	Х	X			
3.4		X	Х		Х
4.1	Х		Х	Х	Х
4.2			Х	Х	Х
4.3			Х	Х	Х
4.4	Х	Х	Х	Х	Х
4.5		Х			Х
4.6		Х	Х		Х
5.1		Х			Х
5.2	Х	Х	Х		Х
5.3		Х	Х		Х

Definitions

<u>Quiz</u>: an online series of questions, generally automatically marked

Interview: questions asked by the assessor in person

Observation: a workplace observation, either simulated or real

Portfolio: a collection of evidence prepared by the candidate for assessment

<u> 3^{rd} Party Report</u>: a written endorsement of the candidates ability to perform the task by a 3^{rd} party

Performance Criteria Descriptions

Performance criteria are described in more detail below, providing candidates guidance on how to demonstrate competence in each.

Performance	Description
Criteria	
1.1	By default, the GA manual solution should be used, however, in discussion with GA, an international bulletin may be used instead. The agreed seismic manual solution should be loaded into the DST. Discussions with GA should also focus on the earthquake magnitude, location, depth, tsunamigenic potential and fault type (if known). If no MOST scenario matches the event, this should be discussed with GA
1.2	International and GA bulletins should be accessed and assessed. Comparisons should focus on earthquake magnitude, location and depth. Travel times may also be compared. Uncertainties, particularly in relation to earthquake magnitude should be discussed with GA and 'what-if' assessments should be performed to determine the threat levels that may results from slight changes in magnitude
1.3	For large volcanic eruptions, GA may be able to provide seismic information upon which the threat assessment can be performed. VAAC should be consulted to determine the scale of the eruption and hence the possibility for a tsunami to be generated. By default, the Felt Earthquake No Threat Bulletin will be issued
1.4	Threat assessment based on the seismic solution or manually entered data should be performed in the DST by clicking on the IOTWS Assessment tab. As part of this initial assessment, the Earthquake Bulletin should be sent. The earthquake location should be investigated through mapping software to determine proximity to the fault line. Areas affected should be interpreted through the text list in DST or the graphical threat map. Discrepancies between IOTWS and ATWS threats for overlapping service areas should be explained
1.5	Threat assessment based on the seismic solution or manually entered data should be performed in the DST by clicking on the ATWS Assessment tab. The earthquake location should be investigated through mapping software to determine proximity to the fault line. Areas affected should be interpreted through the text list in DST or the graphical threat map. Discrepancies between IOTWS and ATWS threats for overlapping service areas should be explained. Orphaned zones should be included as directed in the SOPs
1.6	Actions include identifying the appropriate initial tsunami bulletins to send based on the threat assessment, deciding whether JATWC will need to be activated and whether to initiate a conference call with the RFCs and if so which RFCs to contact. Threat reassessment based on new seismic information or sufficient tsunami observational evidence may lead to lower threat levels and associated cancellation and finalisation of warning products
1.7	Tsunami travel time and ETA should be assessed to help prioritise actions such as contact with the RFCs and issuing warning products based on immediate threat (i.e. whether ATWS should be prioritised over IOTWS). The earliest impact on Australia should be noted for use in briefings. Tsunami ETA information should also be used to identify which observation sites to monitor and when the tsunami is expected to impact the sites.
1.8	When no MOST scenario can be found for the earthquake event, the DST will automatically use the Simplified TTT Method. This should be noted and communicated to GA. ATWS and IOTWS threat assessments, if required, should be performed in the DST on the basis of this method. The threat assessment should be related back to the method definition described in the SOPs
1.9	Unexplained sea-level observations should be assessed to determine whether the wave characteristics match those expected for a tsunami (i.e. long period, low

	amplitude in deep water, higher in shallow water). Reactionary warnings should be issued in these cases as directed in the SOPs
1.10	Based on new seismic information or reliable tsunameter observations (see criteria 4.4), modify the earthquake details and perform a threat reassessment in the DST. Threat upgrade may be based on one tsunameter, but two are required to downgrade
2.1	Any tasks delegated by the JATWC Incident Manager should be clarified as necessary then completed. Completion of the task or any issues must be communicated to the Incident Manager
2.2	Key information such as threat reassessments, observations/reports, system issues, unrecorded phone calls or decisions should be logged in a suitable format for use in briefings and post-event analysis
2.3	Throughout the event, attention should be paid to the Incident Managers actions and decisions in order to ensure the warning service is delivered effectively. If discrepancies are noticed in products or the process compared to SOPs, this should be raised with the Incident Manager
3.1	IOTWS Bulletins should be issued in the correct sequence and within the required time-frame (where possible) in accordance with the SOPs. This may include No Threat, Potential Threat, Confirmed Threat and Finalisation Bulletins
3.2	The ATWS National Watch or No Threat Bulletin should be issued on the basis of the ATWS threat assessment within the required time-frame (where possible) in accordance with the SOPs. The National Watch Bulleting must be issued before any regional watches/warnings. Rules regarding issuing a No Threat Bulletin when only certain ATWS areas are under threat should be understood and explained
3.3	The purpose for, and appropriate context in which regional watches and warnings are issued should be understood and explained. The two triggers for moving into warning mode (i.e. confirmed tsunami or unconfirmed but immediate threat) should be explained and applied correctly in warning events
3.4	After any product is issued by either the Incident Manager or Science Officer, the external web should be checked to confirm successful transmission. Any discrepancies or errors should be brought to the attention of the Incident Manager
4.1	With the support of the Incident Manager, sea-level observations (coastal gauges and tsunameters) should be monitored continually throughout the event using the ETA as a guide to prioritisation. Observations sites that record a tsunami may record subsequent waves of higher amplitude and must therefore be monitored after the first wave. Wave properties such as period and amplitude should be assessed to determine the nature of the sea-level anomaly. Reliable reports of sea-level changes associated with the tsunami may be used to confirm the tsunami threat. Verification of the tsunami threat can be performed based on tsunameter data with the help of envelope plots or based on ASLOS coastal gauges compared to the threat level for that region. Site metadata should be used when interpreting coastal sea-level gauges to assess how the site observation may translate to impacts on the surrounding area
4.2	The maximum positive amplitude (i.e. height above mean sea-level) should be determined from observations and entered into the DST Observations table in the format specified as soon as possible. If a higher amplitude wave is observed at a site, this new observation should be entered both in terms of height and time of observation
4.3	Anecdotal reports may be received from a range of sources and should be entered into the Reported Tsunami Impacts form in the DST
4.4	Tsunameter observations should be interpreted in conjunction with envelope plots to determine the effective earthquake magnitude associated with the observed amplitude. If the effective earthquake magnitude falls outside the envelope, this

	may lead to threat reassessment (see 1.10). Any changes to the threat assessment implied by this method must be brought to the attention of the Incident Manager for consideration
4.5	Televisions in JATWC and BNOC should be turned on and monitored. Online news and social media should also be monitored
4.6	ATWS tsunameters expected to observe the tsunami should be triggered into event mode at an appropriate time to ensure high temporal resolution reporting of sea- level in order to resolve the tsunami signal
5.1	The GA duty seismologist should be consulted at the start of the event and whenever significant new information is received by either GA or BNOC. Topics requiring discussion are listed in the SOPs. Liaison will take place over the dedicated tsunami video conference equipment
5.2	Communication should be succinct, prioritised, tailored and appropriately emphasised for the target audience
5.3	Briefings should be provided as requested, as time permits and in accordance with the SOPs to Bureau managers and other important stakeholders (e.g. the AGCCC)

Underpinning Skills/knowledge

- Threat level definitions for IOTWS and ATWS
- Product requirements, especially in relation to offshore and Antarctic
- TTT rounding down to the nearest 15-minute interval
- Simplified TTT Method application
- Usage of envelope plots to determine effective magnitude based on tsunameter observations
- Able to use the DST
- Able to use the video conference equipment to liaise with GA
- Able to use the tsunami phone to establish a conference call with RFCs

Glossary

ATWS	Australian Tsunami Warning System
BNOC	Bureau of Meteorology National Operations Centre
DST	Decision Support Tool
ETA	Estimated Time of Arrival
GA	Geoscience Australia
IOTWS	Indian Ocean Tsunami Warning & Mitigation System
JATWC	Joint Australian Tsunami Warning Centre
RFC	Regional Forecasting Centre
SOP	Standard Operating Procedures
PO2	Professional Officer (Class 2)
Tsunameter	Deep Ocean Sea-Level Detection Buoy
TTT	Tsunami Travel Time

VAAC Volcanic Ash Advisory Centre

Resources

BNOC Tsunami Warning Process Module on Latitude - <u>http://latitude.bom.gov.au/course/view.php?id=57</u>

BNOC SOPs - http://web.bom.gov.au/nmoc/srco/Tsunami/

CHILE - NTWC TRAINING

From: Sifon, Matias - Jefe Dpto. Oceanografía <msifon@shoa.cl> Date: Tue, Aug 22, 2023 at 4:48 PM Subject: Chile - NTWC Competency Framework To: laura.kong@noaa.gov <laura.kong@noaa.gov> Cc: Zuñiga, Carlos - Subdirector <czuniga@shoa.cl>, Matus, Jorge - Jefe de Division SNAM - OCE <jmatus@shoa.cl>

Dear Laura,

Sorry for this very late response. Im sending you an outline of our trainings. The detailed documentation in spanish will be sent in shortly. Please let me know if this is the expected information or if should I change or include something.

The training process of the Chilean National Tsunami Warning System (SNAM) is divided into two fundamental areas:

1) INITIAL PREPARATION: Training through which new people obtain the minimum competencies to operate within the Operational Rooms of the SNAM organization. In that sense, the capacitation will depend on the particular duty, but at the end of each process, no matter the job, there is a practical evaluation with a highly complex operational exercise conducted by the SNAM training team.

The whole process is controlled through a document called Operational Position Qualification (CPO by its name in Spanish), which has the theoretical and practical tasks that the person has to accomplish and its certified by a monitor, also they have to cover duty shifts accompanying experienced personnel.

The roles covered at SNAM, along with their formation and approximate time required to achieve the competency level, are:

Chief of Duty (4 months): This position is for Navy Officers with the rank of Commander or Lieutenant Commander (at least 20 years of Service). They are decision-makers and do not necessarily have a technical background in Earth Sciences. Therefore, to acquire minimal technical knowledge, they do a tsunami diploma at the "Pontificia Universidad Católica de Valparaíso" taught by various experts in Tsunamis and related areas, aimed to early warnings decisions.

Once they have approved the Diploma, they must learn through an Online platform (asynchronous) and later in person at SHOA with professionals from the SNAM Division, during which, procedures and operational flows are explained to them, along with the technical information about different softwares used.

The final part is divided into the evaluation of theoretical and technical knowledge and a period of practical training with a set of exercises that include near-field and far-field scenarios and alternative systems, among others.

The final Qualification consist of a drill in which each of them is evaluated by the director, deputy director, head of oceanography, and head of Snam Division of SHOA, involving the whole command chain of SNAM.

Communication's Officer: This position is covered by a Leautenant, who can either be specialized in oceanography or not. The two main functions are being in charge of the communications, meaning mainly dissemination to NDMO, and to assume as Chief of Duty in case he can't do it. The training is very similar, but the diploma and online part are not required, although if possible, they are done. The qualification process is very similar, including a theoretical quiz and a practical evaluation.

Technical Advisor: These are civil professionals with a background in Earth Sciences or related areas. However, this only guarantees a thorough knowledge of some subjects associated with tsunamis. Therefore, they carry out the module of theoretical classes on the online platform (asynchronous) and then in person by professionals from the SNAM Division as a standardization of knowledge.

Qualification consists of the same process as the Chief of Duty and Communication's Officer. A theoretical quiz with a practical evaluation in this case, taken by the Head of Oceanography along with the Chief of Snam Division.

Operator: Navy technical personnel trained as Oceanographer-Hydrographer trained at the SHOA Instruction Center. The CPO process for them is focused on procedures and systems operation with very identified tasks. Therefore, they are trained in the different positions to be covered: Application Operator, Information Receiver, Communications, and Logbook.

Others: There is also a simplified induction process for personnel that doesn't perform technical actions in the Operational Rooms but has a responsibility associated with it, for example, the IT technician on duty.

2) CONTINUITY OF TRAINING: Chile's NTWC has developed a training scheme based on four levels associated with the degree of involvement: on-duty personnel, institutional, inter-institutional (national level), and regional (international). Each of these levels has a different focus and specific objectives:

At the most basic level, there are daily exercises oriented to practicing internal procedures, the use of technical information, and the development of the first actions of the on-duty personnel,

with simulated situations such as equipment failures, use of alternative systems, and operation flows, focusing also on the minimal decisions excepted.

The second level contemplates the whole SHOA organization, forming the different teams of decision makers, technical advisors, maintainers, and logistic support, facing scenarios with local impact on the systems, injured personnel, damages to the

infrastructure (collapse of buildings, fires, or flooding) and use of alternative systems including the backup operational rooms. These have a monthly frequency.

The third level involves the National Disaster Prevention and Response System (SINAPRED), including the NDMO and the National Seismological Center (CSN), generating actions from the national system to the local emergency units in the communities, focusing on coordination, primary and alternative communications links, unavailability of services due to local impact and communication of the mitigation actions to the community. SINAPRED carries out these exercises quarterly.

The upper and last one is the regional level, as part of the Regional Working Group of the Southeast Pacific Tsunami Warning and Mitigation System (SEP-WG), with the execution of coordination exercises between Chile, Colombia, Ecuador, and Peru, with scenarios including the regional block, focusing on improving the information shared among the NTWC's and the common systems, procedures and terminology.

Again, if there's something that needs to be improved from the information above, let me know, and we will do it as soon as possible. The more detailed documentation will be shared in Spanish at first time in the morning (our morning).

Kindly, Matias

------ Forwarded message ------From: **Sifon, Matias - Jefe Dpto. Oceanografía** <msifon@shoa.cl> Date: Wed, Aug 23, 2023 at 6:01 AM Subject: Chile - NTWC Competency Framework To: Laura Kong <laura.kong@noaa.gov> Cc: Zuñiga, Carlos - Subdirector <czuniga@shoa.cl>, Matus, Jorge - Jefe de Division SNAM - OCE <jmatus@shoa.cl>

Dear Laura,

Complementing the previous email, I'm sending the evaluation forms we use, along with the training details and scope for each type of training and finally an example of a daily drill development which can be used as general example for any other drill carried out here at SHOA.

I believe this would answer the requirement but if there's anything missing or needs more detail please let me know so we can provide useful information.

Best Regards, Matías Matias I. Sifón Lieutenant Head of the Oceanography Department

National Tsunami Warning Center (SHOA) Staff Training Process				
Position	Profile	Stages		
Chief of Duty	Navy Officer	Diploma on Earthquakes and Tsunami		
		100 hrs general Knowledge leveling		
		Tsunami Division Internship		
		4-6 weeks in depth courses on Earthquakes and Tsunamis		
		Written Test		
		Operational Post Evaluation		
Communications Officer	Navy Officer	Diploma on Earthquakes and Tsunami		
		100 hrs general Knowledge leveling		
		Operational Post Evaluation		
Technical Advisor	Civilian Earth Science Degree	Diploma on Earthquakes and Tsunami		
		100 hrs general Knowledge leveling		
		Tsunami Division Internship		
		4-6 weeks in depth courses on Earthquakes and Tsunamis		
		Written Test		
		Operational Post Evaluation		
Operator	Navy Petty Officer	Operational Post Evaluation		

National Tsunami Warning Center (SHOA) Operational Post				
Post	Profile	Operational Capabilities		
Chief of Duty	Navy Officer	Leads Tsunami Threat Assessment Process		
		Handles comunicatiuons with Navy'es High Command		
Communications	Navy Officer / Navy Petty Officer	Radio: UHF, VHF, HF		
		Satelite Coms. Iridium and Inmarsat		
		Land Lines Phones		
		Naval Communication's web Portal		
		Collects Tsunami Field Observers reports		
Seismic Source monitoring	Navy Petty Officer	Information Reception (email, Seismological and PTWC webpages)		
		Decision Support System (SSD -Tailor made for SHOA)		
Tsunami Threat Assessment	Navy Petty Officer	Decision Support System (SSD -Tailor made for SHOA)		
	Technical Advisor	Integrated Tsunami Warning Prediction System (Tailor made)		
		Sea Level Real Time Tsunami Amplitudes Monitor		
		For Chilean and International Tide Gauges. Tailor made for SHOA		
		Decision Support System (SSD -Tailor made for SHOA)		
		PMEL - Tweb Evaluation		
Manual Situational Dashboard	Navy Petty Officer	Display seismic current information under assessment		
		Displays current stage of operational procedures		
		Displays current Tsunami threat assessment results		
		Displays Sea Level available information		
		Display ETA for Tide Network		
Communications Support	Navy Petty Officer	Supports Chied of Duty communications requirements		
		Receives external information from Information room		
Information room	Navy Petty Officer	Receives any information request from civilian authorities		
		Receives informations request from the press		

	National 1	Tsunami Warning Center (SHO	DA) Operational Drills
		manent Operational Capabili	
Tsunami Threath Assessment C	perational Procedures (SSD - SIPAT)	manent Operational Capabili	
 PTWC Products Assessment 			
 Sea Level Real Time Tsunami Ar 	mplitudes Monitor		
 Personal Mic-Headphones Com 	•		
Comunication's Optimization du			
	in procedures and equipments operations		
	recovery (GOES - Inmarsat - GPRS)		
 Tsunami Threat Cancelation Pro 			
	Va	ariable Operational Capabiliti	ies Evaluation
Spectrum	Participating Agencies	Frecuency	Operational Capabilities Evaluation
Pacific Basin	PTWS (PacWave)	Every two years	PTWC Products Assessment
			Tsunami Modeling
			Regional Cooperation (South East Pacific - Working Group)
			Duty Staff Operational Management for long term emergencies
			Sea Level real Time monitoring improvements for international Tide Gauges
Regional	NTWC - SEP WG	Twice a wear	PTWC Products Assessment
¥			Sea Level real Time data sharing between Regional NTWC
			Tsunami Modeling
			Regional Comunications Protocols (South East Pacific - Working Group)
National	National Emergency Agency (SENAPRED)	Three times a year	Inter Agencies Comunication's Optimization during Emergencies
	National Seismological Center (CSN)	•	Power failure emergency procedures
	NTWC (SHOA)		Decision Support System (SSD -Tailor made for SHOA)
			Integrated Tsunami Warning Prediction System SIPAT -Tailor made for SHOA)
			Simultaneous seismic events from different sources
			Aftershocks Tsunami Threat Assessment
Navy	SHOA	Once a year	Naval Communication's web Portal
		- ··· / ··	Field observation and reporting from Maritime Authorithies
			Alternate NTWC operations during emergencies
			On duty staff shift rotations
			Simultaneous seismic events from different sources
			Aftershocks Tsunami Threat Assessment
Internal	SHOA	Monthly	Power Backup Emergency Porocedures
		,	SSD backup Servers emergency Procedures
			Power failure emergency procedures
			Internet failure emergency procedures
			Earthquake emergency evacuation procedures
			Alternate NTWC operations during emergencies
			External emergencies (Fire - Medical)
			On duty staff shift rotations
			Simultaneous seismic events from different sources
			Aftershocks Tsunami Threat Assessment
			Naval Communication's web Portal
Internal	SHOA	Daily	Simultaneous seismic events from different sources
mernar	0.101	Juny	Aftershocks Tsunami Threat Assessment
			Naval Communication's web Portal
			SSD backup Servers emergency Procedures
			Power failure emergency procedures
			rower failure entergency procedures
			Internet failure emergency procedures





Pautas de Entrenamiento Ejercicio Diario Sección Operaciones SNAM Marzo 2020





ENTRENAMIENTO DIARIO

Ejemplo: Ejercicio Quellón

1. ONEMI

18:05

De: ONEMI [mailto:jefedeturno@onemi.gov.cl] Enviado el: 19 de Agosto de 2019 18:05 Para: SNAM 1 Asunto: Complementa Sismo Número 254-A (Mayor Intensidad) Sistema Nacional de Alarma de Maremotos, SNAM:

El Centro Nacional de Alerta Temprana reporta información del siguiente evento sísmico

Información del Sismo

Fecha y Hora del Evento: 19/08/2019 - 18:03

Fecha y Hora del Reporte: 19/08/2019 - 18:05

Máxima Intensidad Percibida: VII (Mercalli)

Número de Sismo: 254-A

Reportes de Intensidad (Mercalli) por Localidad

Región: Los Lagos Puerto Montt VII

o Procedimientos

- Verificación de Parámetros: Fecha, Hora, Intensidad.
- Activación Zafarrancho Clave TANGO por Intensidad.
- Aviso a Oficial de Guardia y Jefe de Servicio.

		PATRIOTIS	МО		
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER	



Ejemplo: Ejercicio Quellón

3. P-TIME

18:07

-----Forwarded message ------From: <<u>ptwc@ptwc.noaa.qov</u>> Date: 2019-08-19 18:08 GMT-04:00 Subject: PTWC P-TIME MESSAGE To: <u>snam@snamchile.cl</u>

FROM PACIFIC TSUNAMI WARNING CENTER

THIS IS PRELIMINARY DATA, NOT FOR PUBLIC DISSEMINATION. COMPLETE INFORMATION CAN BE OBTAINED FROM THE USGS/NEIC TELEPHONE (303) 273-8500.

H 22:03:00Z AUG 19 2019Z LAT 43.52S LONG 74.0W DEPTH 27.0km Mwp 7.9 (13 STATIONS)

IN SOUTHERN CHILE

FORT P 181526.4 WB2 P 181547.8 WRAB P 181547.9 BBOO P 181615.3 MEEK P 181628.1 MBWA P 181630.2 MORW P 181701.0 MTN P 181701.9 QLP P 181706.6 NWAO P 181708.2 CTAO P 181746.7 COEN P 181758.7 MMRI P 181818.8 JAGI P 181906.6

o Procedimientos

- o Verificación de Parámetros: Fecha, Hora, Intensidad.
- o Inicio de Cronómetro 18:07.
- Ubicación del Epicentro y definición de Flujo Operativo.
- Verificación polígono de Remoción en masa y Zona Tsunamigénica.
- Evaluación por SIPAT

PATRIOTISMO

		_	
$\square \cap$	NC	۱D.	
		<u> </u>	

LEALTAD

VALENTÍA

INTEGRIDAD







Ejemplo: Ejercicio Quellón

Fuente	PTWC P-time
HRI	18:07
Hora Sismo	18:03
Mag	7.9
Lat	-43.52
Long	-74.00
Arica y Parinacota	Informativo
Tarapacá	Informativo
Antofagasta Norte	Informativo
Antofagasta Sur	Informativo
Atacama Norte	Informativo
Atacama Sur	Informativo
Coquimbo	Informativo
Valparaíso	Informativo
Libertador General Bernardo O'Higgins	Informativo
Maule	Informativo
Nuble-Biobio	Precaución
Araucanía	Precaución
Los Rios	Precaución
Los Lagos Norte	Precaución
Los Lagos Sur	Alerta
Aysén	Alerta
Magallanes	Informativo
Antártica Chilena	Informativo
Juan Fernández	Informativo
San Félix	Informativo
Isla de Pascua	Informativo

\circ Procedimientos

• Tiempo Máximo de Difusión 18:12.

		PATRIOTISMO	C		
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER	



Ejemplo: Ejercicio Quellón

5. CSN PRELIMINAR

18:12

------ Mensaje reenviado -----De: <preliminar@csn.uchile.cl> Fecha: 19 de Agosto de 2019, 18:12 Asunto: 44 km al NW de Melinka (7.8 Ml) Para:

Informe Preliminar de Sismo

Hora UTC : 2019/08/19 22:03:00 Hora Loc : 2019/08/19 18:03:00 Retardo : 4.00 Min Coord : Lat : -43.5 Lon : -73.8 MAG : 7.8 Ml PROF : 27.0 km. Localidad : 44 km al NW de Melinka

o Procedimientos

- Tiempo Máximo de Difusión 18:12.
- Nueva Información Sísmica con menor Magnitud. Debe ser Evaluada por SIPAT ya que peor escenario depende de la ubicación del Epicentro y Magnitud.
- SIPAT no ubica escenarios, se procede a la evaluación por Radios.

		PATRIOTIS	O N	
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER



Ejemplo: Ejercicio Quellón

Fuente	PTWC P-time	CSN Preliminar
HRI	18:07	18:12
Hora Sismo	18:03	18:03
Mag	7.9	7.8
Lat	-43.52	-43.5
Long	-74.00	-73.8
Arica y Parinacota	Informativo	Precaución
Tarapacá	Informativo	Precaución
Antofagasta Norte	Informativo	Precaución
Antofagasta Sur	Informativo	Precaución
Atacama Norte	Informativo	Precaución
Atacama Sur	Informativo	Precaución
Coquimbo	Informativo	Precaución
Valparaíso	Informativo	Precaución
Libertador General Bernardo O'Higgins	Informativo	Precaución
Maule	Informativo	Precaución
Ñuble-Bioblo	Precaución	Precaución
Araucanía	Precaución	Alerta
Los Ríos	Precaución	Alerta
Los Lagos Norte	Precaución	Alerta
Los Lagos Sur	Alerta	Alerta
Aysén	Alerta	Alerta
Magallanes	Informativo	Informativo
Antártica Chilena	Informativo	Informativo
Juan Fernández	Informativo	Precaución
San Félix	Informativo	Precaución
Isla de Pascua	Informativo	Precaución

• Procedimientos

N.U.M

 Evaluación por radios entrega peor escenario. Se sugiere descartar esta información por cuanto ya se dispone de resultado SIPAT previo basado en modelaciones.

		PATRIOTISMO	C		
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER	
nonon				DEBER	



			18:14
Mensaje reenv	/iado		
De: USGS ENS <ens@< td=""><td></td><td>v></td><td></td></ens@<>		v>	
Fecha: 19 AUG 2019,			
Asunto: 2019-08-19 22)	
Para: snam@snamchi	le.cl		
== INFO	RME PRELIM	INAR DEL TEMBLOR =	=;
		rthquake Hazards Prog	am
nttp://	earthquake.u	sgs.gov	
Version : Este informe	e <mark>re</mark> emplaza o	cualquier informe anterio	r sobre este temblo
		cualquier informe anterio omputadora y todavia no	
Esto es un mensaje or por un sismologo.	iginado por c	omputadora y todavia no	
Esto es un mensaje or	iginado por c	omputadora y todavia no	
Esto es un mensaje or por un sismologo. PAR�METROS PRIN Magnitud	iginado por c CIPALES DE : 8.0	omputadora y todavia no L TEMBLOR	ha sidorepasado
Esto es un mensaje or por un sismologo. PAR�METROS PRIN	iginado por c CIPALES DE : 8.0	DESTINATION OF THE DESTINATION O	ha sidorepasado hora local
Esto es un mensaje or por un sismologo. PAR METROS PRIN Magnitud	iginado por c CIPALES DE : 8.0	omputadora y todavia no L TEMBLOR	ha sidorepasado hora local
Esto es un mensaje or por un sismologo. PAR METROS PRIN Magnitud	iginado por c CIPALES DE : 8.0	Demputadora y todavia no L TEMBLOR 	ha sidorepasado hora local

• Procedimientos

- Evaluación por radios entrega peor escenario. Se sugiere descartar esta información por cuanto ya se dispone de resultado SIPAT previo basado en modelaciones.
- Nueva Información Sísmica 18:14. Aumento de Magnitud y Variación de Epicentro requiere nueva Evaluación SIPAT.

		PATRIOTISMO)	
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER



Ejemplo: Ejercicio Quellón

Fuente	PTWC P-time	CSN Preliminar	USGS
HRI	18:07	18:12	18:14
Hora Sismo	18:03	18:03	18:03
Mag	7.9	7.8	8.0
Lat	-43.52	-43.5	-43.45
Long	-74.00	-73.8	-74.08
Arica y Parinacota	Informativo	Precaución	Informativo
Tarapacá	Informativo	Precaución	Informativo
Antofagasta Norte	Informativo	Precaución	Informativo
Antofagasta Sur	Informativo	Precaución	Informativo
Atacama Norte	Informativo	Precaución	Informativo
Atacama Sur	Informativo	Precaución	Informativo
Coquimbo	Informativo	Precaución	Informativo
Valparaíso	Informativo	Precaución	Informativo
Libertador General Bernardo O'Higgins	Informativo	Precaución	Informativo
Maule	Informativo	Precaución	Informativo
Ñuble-Bioblo	Precaución	Precaución	Precaución
Araucania	Precaución	Alerta	Precaución
Los Ríos	Precaución	Alerta	Precaución
Los Lagos Norte	Precaución	Alerta	Precaución
Los Lagos Sur	Alerta	Alerta	Alarma
Aysén	Alerta	Alerta	Alerta
Magallanes	Informativo	Informativo	Informativo
Antártica Chilena	Informativo	Informativo	Informativo
Juan Fernández	Informativo	Precaución	Informativo
San Félix	Informativo	Precaución	Informativo
Isla de Pascua	Informativo	Precaución	Informativo

o Procedimientos

C D

- Evaluación por radios entrega peor escenario. Se sugiere descartar esta información por cuanto ya se dispone de resultado SIPAT previo basado en modelaciones.
- Nueva Información Sísmica 18:14. Aumento de Magnitud y Variación de Epicentro requiere nueva Evaluación SIPAT.
- Variación en Bloque Lagos Sur no implica cambio de acción por parte de ONEMI. Se descarta nuevo Boletín.
- Envío de Boletín 02 con información de horas estimadas de arribo.

		PATRIOTISMO	D		
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER	



Ejemplo: Ejercicio Quellón

7. PTWC Boletín 1.

18:16

From: SNAM 1 <<u>snam@shoa.cl</u>> Date: 2019-08-19 18:16 GMT-04:00 Subject: RV: [Tsunami Message - IOC] NWS-NTWC Tsunami Information Statement To: SNAM SAT <<u>snam@snamchile.cl</u>>

TSUNAMI MESSAGE NUMBER 1 NWS PACIFIC TSUNAMI WARNING CENTER EWA BEACH HI 2216 UTC AUG 19 2019

..PTWC TSUNAMI THREAT MESSAGE...

**** NOTICE **** NOTICE **** NOTICE **** NOTICE **** NOTICE ****

THIS MESSAGE IS ISSUED FOR INFORMATION ONLY IN SUPPORT OF THE UNESCO/IOC PACIFIC TSUNAMI WARNING AND MITIGATION SYSTEM AND IS MEANT FOR NATIONAL AUTHORITIES IN EACH COUNTRY OF THAT SYSTEM.

NATIONAL AUTHORITIES WILL DETERMINE THE APPROPRIATE LEVEL OF ALERT FOR EACH COUNTRY AND MAY ISSUE ADDITIONAL OR MORE REFINED INFORMATION.

**** NOTICE **** NOTICE **** NOTICE **** NOTICE **** NOTICE ****

PRELIMINARY EARTHQUAKE PARAMETERS

- * MAGNITUDE 8.1
- * ORIGIN TIME 2203 UTC AUG 19 2019
- * COORDINATES 43.5 SOUTH 73.8 WEST
- * DEPTH 15 KM / 16.15 MILES
- * LOCATION SOUTHERN CHILE

• Procedimientos

- Nueva información sísmica 18:16. Aumento de Magnitud y Variación de Epicentro requiere nueva Evaluación SIPAT.
- Posteriormente se deberán generar nuevas horas de arribos con bloque no considerados bajo a Amenaza previamente.

		PATRIOTISMO)		
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER	





Ejemplo: Ejercicio Quellón

Fuente	PTWC P-time	CSN Preliminar	USGS	PTWC Boletin 1
HRI	18:07	18:12	18:14	18:16
Hora Sismo	18:03	18:03	18:03	18:03
Mag	7.9	7.8	8.0	8.1
Lat	-43.52	-43.5	-43.45	-43.5
Long	-74.00	-73.8	-74.08	-73.88
Arica y Parinacota	Informativo	Precaución	Informativo	Precaución
Tarapacá	Informativo	Precaución	Informativo	Informativo
Antofagasta Norte	Informativo	Precaución	Informativo	Informativo
Antofagasta Sur	Informativo	Precaución	Informativo	Informativo
Atacama Norte	Informativo	Precaución	Informativo	Informativo
Atacama Sur	Informativo	Precaución	Informativo	Informativo
Coquimbo	Informativo	Precaución	Informativo	Precaución
Valparaíso	Informativo	Precaución	Informativo	Precaución
Libertador General Bernardo O'Higgins	Informativo	Precaución	Informativo	Precaución
Maule	Informativo	Precaución	Informativo	Precaución
Ñuble-Bioblo	Precaución	Precaución	Precaución	Alerta
Araucania	Precaución	Alerta	Precaución	Alerta
Los Ríos	Precaución	Alerta	Precaución	Alerta
Los Lagos Norte	Precaución	Alerta	Precaución	Alamin
Los Lagos Sur	Alerta	Alerta	Allarma	Alumna
Aysén	Alerta	Alerta	Alerta	Altamia
Magallanes	Informativo	Informativo	Informativo	Precaución
Antártica Chilena	Informativo	Informativo	Informativo	Informativo
Juan Fernández	Informativo	Precaución	Informativo	Precaución
San Félix	Informativo	Precaución	Informativo	Informativo
Isla de Pascua	Informativo	Precaución	Informativo	Precaución

• Procedimientos

NO.

- Nueva información sísmica 18:16. Aumento de Magnitud y Variación de Epicentro requiere nueva Evaluación SIPAT.
- Posteriormente se deberán generar nuevas horas de arribos con bloque no considerados bajo a Amenaza previamente.
- Evaluaciones posteriores en base a productos contenidos en Boletín 02 PTWC no serán considerados para sismo de campo Cercano.

			PATRIOTISMO	D		
HONOR LEALTAD VALENTIA INTEGRIDAD DEDER	HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER	





GRACIAS



		PATRIOTISM	0	
HONOR	LEALTAD	VALENTÍA	INTEGRIDAD	DEBER



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: JEFES DE SERVICIO SNAM

EVENTO: "_____"

Personal Evaluado: ______ Fecha: ______

	OBJETIVO		OBSERVACI	ONES DETECTADAS	
		S/OBS.	MENOR	SIGNIFICATIVA	CRÍTICA
1.	Manejo claro y priorizado de la información recibida.				
2.	Seguimiento al flujo de acciones.				
3.	Fluidez y aplomo en el manejo de la emergencia, mantiene presencia y liderazgo durante el desarrollo del evento.				
4.	Hace uso de las herramientas disponibles en el SNAM.				
5.	Comunicación con el mando (transmite novedades o decisiones).				
6.	Apego al Protocolo / Normativa vigente.				
7.	Se mantiene enfocado en el proceso, manejando interrupciones y situaciones imprevistas de forma asertiva.				
	Total Observaciones:				

% de Aprobación:	80%	SAT	NO SAT
% Obtenido:			

FIRMA CALIFICADOR

Ecs/Jcp/Jgv/2022



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: JEFES DE SERVICIO SNAM

ESTADO	EVALUACIÓN DE ENTRENAMIENTO	EVALUACIÓN SR. DIRECTOR	Penalización %
(C) CRÍTICO	Una falla, por acción u omisión que impide el cumplimiento de la acción evaluada.	Deficiencia u omisión de procedimientos que afectan al SNAM en el cumplimiento de su función de evaluar y difundir la Amenaza de Tsunami. Se debe realizar la corrección de la observación en forma inmediata.	35
(S) SIGNIFICATIVO	Una falla, por acción u omisión que retrasa el cumplimiento de la acción evaluada o se aparta de la normativa aplicable.	Deficiencia u omisión de procedimientos que podrían afectar al SNAM en el cumplimiento oportuno y/o correcto de acuerdo los protocolos establecidos. Se deberá garantizar la corrección de la observación.	15
(M) MENOR	Una debilidad que por acción u omisión, es poco probable que impida el cumplimiento de la acción evaluada dentro de la normativa aplicable.	Deficiencia u omisión de procedimientos que no son frecuentes y su corrección está dentro de las capacidades del SNAM. Es poco probable que obstaculice el cumplimiento de los protocolos establecidos.	5

	TABLA DE EVALUACIÓN I	DE ACUERDO A PORCENTAJE:
EVALUACIÓN:	PORCENTAJE NUMÉRICO	DESCRIPCIÓN
MUY BUENO	95%-100%	Sin deficiencias detectadas y haber alcanzado un desempeño sobresaliente en todas las áreas evaluables del ejercicio.
BUENO	80% - 94%	Alto nivel de capacidad de operar en equipo y una sólida ejecución de los objetivos del ejercicio.
SATISFACTORIO	70% - 79%	Aceptable nivel de capacidad de operar en equipo y una adecuada ejecución de los objetivos del ejercicio.
BAJO ESTÁNDAR	50% - 69%	Inadecuado nivel de ejecución de los objetivos del ejercicio.
NO SATISFACTORIO	1% - 49%	Inaceptable nivel de ejecución de los objetivos del ejercicio.
NO EVALUADO	0%	Durante su ejecución, el ejercicio debe ser suspendido y/o reprogramado.



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: JEFES DE SERVICIO SNAM

OBSERVACIONES

Ecs/Jcp/Jgv/2022



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: OFICIAL DE GUARDIA SNAM

EVENTO: "_____"

Personal Evaluado: ______ Fecha: ______

	OBJETIVO		OBSERVACI	ONES DETECTADAS	
		S/OBS.	MENOR	SIGNIFICATIVA	CRÍTICA
1.	Verificar e informar JS Puestos Cubiertos				
2.	Estar atento a las informaciones recibidas por los medios de comunicación radial y Satelital				
3.	Manejo claro y priorizado de la información recibida.				
4.	Seguimiento al flujo de acciones.				
5.	Hace uso de las herramientas disponibles en el SNAM para la recepción y difusión de informaciones relevantes				
6.	Comunicación con el JS, transmite novedades o decisiones.				
7.	Verificar Mensaje Naval en su estructura y contenido.				
8.	Apego al Protocolo / Normativa vigente.				
9.	Se mantiene enfocado en el proceso, manejando interrupciones y situaciones imprevistas de forma asertiva.				
	Total Observaciones:				

% de Aprobación:	80%	SAT	NO SAT
% Obtenido:			

FIRMA CALIFICADOR

Ecs/Jcp/Jgv/2023



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: OFICIAL DE GUARDIA SNAM

ESTADO	EVALUACIÓN DE ENTRENAMIENTO	EVALUACIÓN SR. DIRECTOR	Penalización %
(C) CRÍTICO	Una falla, por acción u omisión que impide el cumplimiento de la acción evaluada.	Deficiencia u omisión de procedimientos que afectan al SNAM en el cumplimiento de su función de evaluar y difundir la Amenaza de Tsunami. Se debe realizar la corrección de la observación en forma inmediata.	35
(S) SIGNIFICATIVO	Una falla, por acción u omisión que retrasa el cumplimiento de la acción evaluada o se aparta de la normativa aplicable.	Deficiencia u omisión de procedimientos que podrían afectar al SNAM en el cumplimiento oportuno y/o correcto de acuerdo los protocolos establecidos. Se deberá garantizar la corrección de la observación.	15
(M) MENOR	Una debilidad que por acción u omisión, es poco probable que impida el cumplimiento de la acción evaluada dentro de la normativa aplicable.	Deficiencia u omisión de procedimientos que no son frecuentes y su corrección está dentro de las capacidades del SNAM. Es poco probable que obstaculice el cumplimiento de los protocolos establecidos.	5

	TABLA DE EVALUACIÓN I	DE ACUERDO A PORCENTAJE:
EVALUACIÓN:	PORCENTAJE NUMÉRICO	DESCRIPCIÓN
MUY BUENO	95%-100%	Sin deficiencias detectadas y haber alcanzado un desempeño sobresaliente en todas las áreas evaluables del ejercicio.
BUENO	80% - 94%	Alto nivel de capacidad de operar en equipo y una sólida ejecución de los objetivos del ejercicio.
SATISFACTORIO	70% - 79%	Aceptable nivel de capacidad de operar en equipo y una adecuada ejecución de los objetivos del ejercicio.
BAJO ESTÁNDAR	50% - 69%	Inadecuado nivel de ejecución de los objetivos del ejercicio.
NO SATISFACTORIO	1% - 49%	Inaceptable nivel de ejecución de los objetivos del ejercicio.
NO EVALUADO	0%	Durante su ejecución, el ejercicio debe ser suspendido y/o reprogramado.



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: OFICIAL DE GUARDIA SNAM

OBSERVACIONES

 ·	

Ecs/Jcp/Jgv/2023



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: OCEANOGRAFO DE GUARDIA

EVENTO: Pichilemu Personal Evaluado: ______ Fecha: ______ Fecha: _____

SAT(M)(C)(S)Manejo claro y priorizado de la información recibida.• Demarcación del Epicentro y Determinación de referencia geográfica. • Clasificación del Epicentro. • Evaluación SIPAT oportuna.• III1.• Seguimiento al flujo de acciones. • Evaluación SIPAT oportuna.• Demarcación del Epicentro y Determinación de referencia geográfica. • Evaluación SIPAT oportuna.• III2.• Seguimiento al flujo de acciones. • Evaluación SIPAT oportuna.• Demarcación del Epicentro y Determinación de referencia geográfica. • Efectúa evaluación SIPAT. • Activa Clave Tango en SAVTEC. • Recomienda difusión de boletín de horas de arribo cuando sea pertinente.III3.Conocimiento procedimientos alternativos de emergencia, con dominio pleno de ventajas y limitaciones.• Perdida de enlace de Internet: • Dictado de Evaluación. • Visualización Agn V2 en VideoWall. • Activación de internet satelital en pc Tweb para visualización de mareas.III4.Hace uso de las herramientas disponibles en el SNAM. • Comunicación con el mando decisiones).• Cierre de aplicación SEISCOMP. • Activación de Mareas en Pc Tweb. • Visualización de Mareas en Pc Tweb. • Visualización de Mareas en Pc Tweb.III5.Comunicación con el mando decisiones). • Uso de Procedimiento FLASH. • Lectura eficiente de Estados de Amenaza.IIII4Apego al Protocolo / Normativa • Promueve recopilación de información sísmica en• Promueve recopilación de información sísmica enII		OBJETIVO	ACCIONES EVALUADAS		Fallas Observadas		as	
1. información recibida. referencia geográfica. Clasificación de procedimiento aplicable según demarcación del Epicentro. 2. Seguimiento al flujo de acciones. > Demarcación del Epicentro y Determinación de referencia geográfica. 2. Seguimiento al flujo de acciones. > Demarcación del Epicentro y Determinación de referencia geográfica. 3. Conocimiento de mergencia, con domino pleno de ventajas y limitaciones. Perdida de enlace de Internet: 4. Hace uso de las herramientas disponibles en el SNAM. - Cierre de aplicación SEISCOMP. 5. Comunicación con el mando (transmite novedades on decisiones). - Ourocimiento FLASH. 6. Comunicación con el mando (transmite novedades on decisiones). - Ourocimiento FLASH. 6. Apego al Protocolo / Normativa - Promueve recopilación de información sísmica en		OBJEIIVO	ACCIONES	LVALOADAS	SAT	(M)	(C)	(S)
2.Seguimiento al flujo de acciones. referencia geográfica. • Efectúa evaluación SIPAT. • Activa Clave Tango en SAVTEC. • Recomienda difusión de boletín de horas de arribo cuando sea pertinente.effectúa evaluación SIPAT. • Activa Clave Tango en SAVTEC. • Recomienda difusión de boletín de horas de arribo cuando sea pertinente.effectúa evaluación SIPAT. • Activa Clave Tango en SAVTEC. • Recomienda difusión de boletín de horas de arribo cuando sea pertinente.effectúa evaluación SIPAT. • Evaluación SIPAT. • Dictado de Evaluación. • Visualización App V2 en VideoWall. • Activación de mareas.effectúa de alace de Internet: • Dictado de Evaluación. • Visualización App V2 en VideoWall. • Activación de mareas.effectúa evaluación SIPAT. • Dictado de Evaluación. • Visualización de mareas.effectúa de alace de Internet: • Visualización d	1.		referencia geográfica.	 referencia geográfica. Clasificación de procedimiento aplicable según demarcación del Epicentro. 				
3.procedimientos alternativos de emergencia, con dominio pleno de ventajas y limitaciones.Evaluación SIPAT. Dictado de Evaluación. 	2.	Seguimiento al flujo de acciones	 Demarcación del Epicentro y Determinación de referencia geográfica. Efectúa evaluación SIPAT. Activa Clave Tango en SAVTEC. Recomienda difusión de boletín de horas de arribo 					
4. disponibles en el SNAM. • Activación de enlace Satelital en Pc Tweb. • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I • I I • I • I	3.	procedimientos alternativos d emergencia, con dominio plen	 Perdida de enlace de Internet: Evaluación SIPAT. Dictado de Evaluación. Visualización App V2 en VideoWall. Activación de internet satelital en pc Tweb para 					
5. (transmite novedades o decisiones). informaciones importantes.	4.		 Activación de enlace Satelital en Pc Tweb. 					
	5.	(transmite novedades	 Manejo de comunicaciones sin interrumpir otras informaciones importantes. Uso de Procedimiento FLASH. 					
Efectúa Evaluación SIPAT cuando corresponde.	6.	Apego al Protocolo / Normativ vigente.	Promueve recopilación de información sísmica en caso de demora en recepción por correo.					
Se mantiene enfocado en el proceso, asesorando correctamente al Jefe de Servicio en caso de que sea conveniente.Sugiere al JS contactar CSN en caso de demora en la recepción de información. • No descarta información recibida a pesar de discrepancias en Fase W. • Asesora al JS en caso de que se requiera difundir por VHF. • Descarta Productos del PTWC para evento de campo cercanoImage: Content of the term of term o	7.	proceso, asesorand correctamente al Jefe d Servicio en caso de que se	 el el Sugiere al JS contactar CSN en caso de demora en la recepción de información. e No descarta información recibida a pesar de discrepancias en Fase W. e Asesora al JS en caso de que se requiera difundir por VHF. e Descarta Productos del PTWC para evento de 					
% de Aprobación: 80% SAT NO SAT	% d	e Aprobación:		SAT		NO	SAT	
% Obtenido:								

FIRMA CALIFICADOR



PAUTA PARA EVALUACIÓN TÉCNICA ZAFARRANCHO: OCEANOGRAFO DE GUARDIA

ESTADO	EVALUACIÓN DE ENTRENAMIENTO	EVALUACIÓN SR. DIRECTOR	Penalización %
(C) CRÍTICO	Una falla, por acción u omisión que impide el cumplimiento de la acción evaluada.	Deficiencia u omisión de procedimientos que afectan al SNAM en el cumplimiento de su función de evaluar y difundir la Amenaza de Tsunami. Se debe realizar la corrección de la observación en forma inmediata.	35
(S) SIGNIFICATIVO	Una falla, por acción u omisión que retrasa el cumplimiento de la acción evaluada o se aparta de la normativa aplicable.	Deficiencia u omisión de procedimientos que podrían afectar al SNAM en el cumplimiento oportuno y/o correcto de acuerdo los protocolos establecidos. Se deberá garantizar la corrección de la observación.	15
(M) MENOR	Una debilidad que por acción u omisión, es poco probable que impida el cumplimiento de la acción evaluada dentro de la normativa aplicable.	Deficiencia u omisión de procedimientos que no son frecuentes y su corrección está dentro de las capacidades del SNAM. Es poco probable que obstaculice el cumplimiento de los protocolos establecidos.	5

TABLA DE EVALUACIÓN DE ACUERDO A PORCENTAJE:			
EVALUACIÓN:	PORCENTAJE NUMÉRICO	DESCRIPCIÓN	
MUY BUENO	95%-100%	Sin deficiencias detectadas y haber alcanzado un desempeño sobresaliente en todas las áreas evaluables del ejercicio.	
BUENO	80% - 94%	Alto nivel de capacidad de operar en equipo y una sólida ejecución de los objetivos del ejercicio.	
SATISFACTORIO	70% - 79%	Aceptable nivel de capacidad de operar en equipo y una adecuada ejecución de los objetivos del ejercicio.	
BAJO ESTÁNDAR	50% - 69%	Inadecuado nivel de ejecución de los objetivos del ejercicio.	
NO SATISFACTORIO	1% - 49%	 Inaceptable nivel de ejecución de los objetivos del ejercicio. 	
NO EVALUADO	0%	Durante su ejecución, el ejercicio debe ser suspendido y/o reprogramado.	

INDIA - NTWC TRAINING

From: **srinivas** <srinivas@incois.gov.in> Date: Thu, Jun 30, 2016 at 11:43 PM Subject: RE: TWC Staff Competency Requirements/ New Staff Training To: Laura Kong - NOAA Federal <laura.kong@noaa.gov>, Tony Elliott <t.elliott@unesco.org>

Dear Laura,

...


At INCOIS we have two high-level checklists that describe what the operators at the tsunami warning centre should do during an event and during non-event. These checklists are attached with this email. The detailed procedure for each step in these checklists is in turn described in a low-level operations manual. This operations manual is a restricted document since it contains the server IPs, network details, user names and passwords. This operational manual is used during the training sessions when new operators are assigned to the watch standing duties.

We have watch standers at 2 levels: First level is those people who have a bachelors degree in science or a diploma engineering and the second level comprises of people having a post-graduation/Ph.D in science or graduate/post graduate in engineering. We generally take people from Geology, Geophysics, Oceanography, Physics, Mathematics, Computer Science and Electronics backgrounds. We provide them intensive training on the warning centre operations before posting them as watch standers. Training is a continuous activity.


I hope you find this information useful.

Best regards,

Srinivas

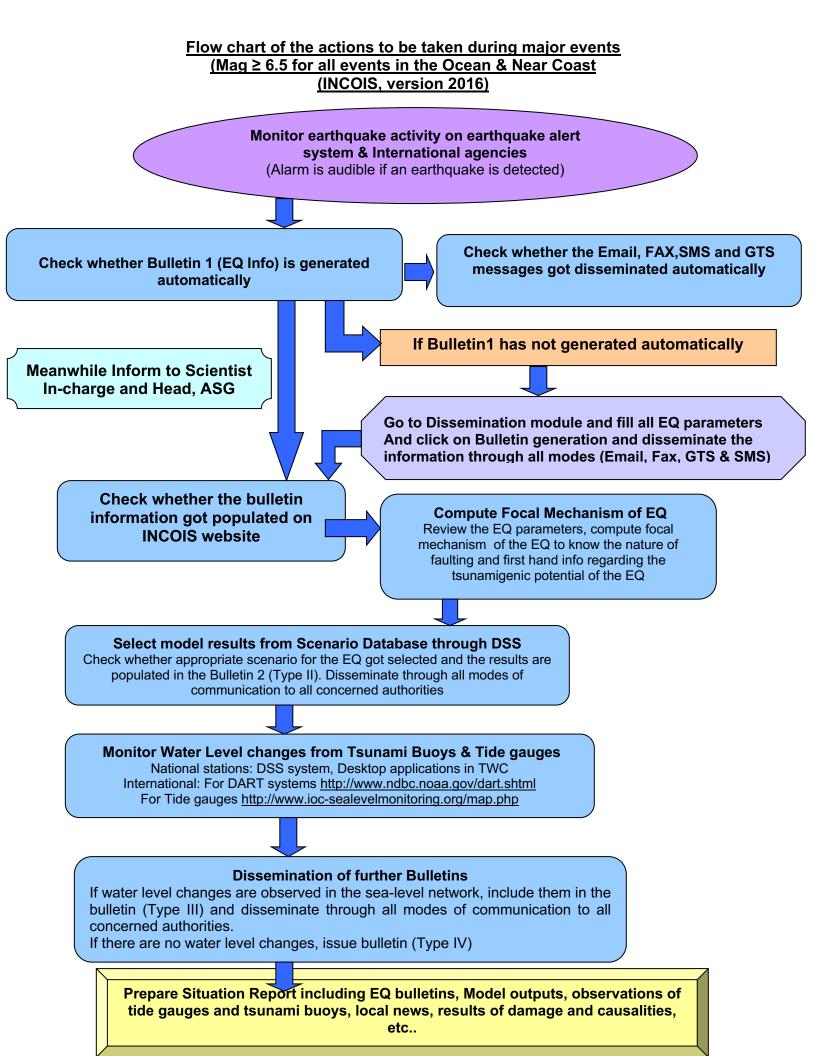

Status checking flow chart for the sub-systems in the Tsunami Warning Centre (INCOIS, version 2016)

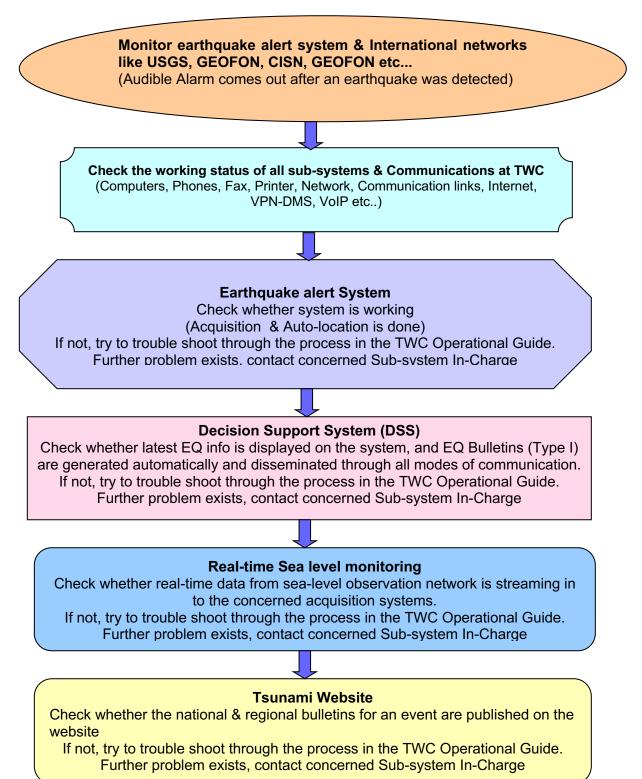

NEW ZEALAND – NTWC TRAINING

From: Lara Bland [NEMA] <Lara.Bland@nema.govt.nz> Date: Sun, Aug 6, 2023 at 11:58 AM Subject: NZ - NTWC Competency Framework To: Laura Kong - NOAA Federal <laura.kong@noaa.gov>

Hi Laura,

Apologies I couldn't get this any sooner – it took a while to coordinate the information from the various teams.

As you might be aware, in NZ NEMA is the NTWC, issuing warnings. However the scientific monitoring and assessment is performed by GNS and we work closely together in tsunami events, effectively 'sharing' the NTWC role. This obviously impacts what training staff receive (eg there is much more emphasis on science competency at GNS). I've therefore collected info from both GNS and NEMA to answer the questions about training as they're both relevant here.

National Geohazards Monitoring Centre/GNS Science (Monitoring and Assessment)	Monitoring, Alerting and Reporting Centre/NEMA (Warnings)
Profile of staff - background, experience for the staff you hire	(degrees, topic, etc)
 Degree in Earth Science Willingness to learn Professional experience preferred (ie experience outside of academic/educational environments) 	 Ability to work in a challenging and time- critical environment Experience operating in a systems-based environment utilising standard operating procedures Experience communicating with diverse audiences and presenting to senior decision makers Experience applying the Intelligence Cycle and producing a range of Intelligence products Knowledge/experience of emergency management processes and planning Experience working in a 24/7 operational environment, including shifts Experience operating a geospatial information system Attention to detail Knowledge of the Machinery of Government Initiative and problem-solving abilities Flexibility and ability to adapt in constantly changing circumstances Professionalism and integrity Personal reliability and resilience Ability to quickly pick up systems or technology

	 Risk assessment capability Proactive approach Enthusiasm and eagerness Customer focus/service industry mindset
Length of NTWC training before they are 'live'	
• 3-9 months	 4 weeks to go on shift as a watch officer Another 4 – 6 weeks once on shift to be assigned a 'sub function' role as either 'Intelligence' or 'Publisher' (supported/led by Watch Leader)
Syllabus of Training - topic, length, how to assure ready (tests software, observer, hands-on, classroom, online, etc)	s, practicum, or ?), medium used for training (live, offline
Tsunami training comprises:	Training comprises:
 A general introduction to tsunami science and hazards involving readings such as the Bell et al 2014 paper on slow rupture events, and recorded lectures from scientists on tsunami causes and mechanisms etc. Reading and understanding the TOAST guidelines 	 2 weeks initial training (Monday to Friday) focussing on our agency key working relationships (including GNS Science – Geological Hazards advice and Metservice – Weather advice) Introduction to hazards and hazard monitoring systems
and relevant SOPs	 1 week of drilling (multiple per day) 1 week shadowing a watch team Once 'sub- function' role is identified, further specific training is completed
 'Hands on' training using the TOAST tsunami simulation tool in local, Kermadec, and regional scenarios 	 Training utilises: record of learning/training log, in-person exercises in-person training of SOPs in-person training of tools
• Following training, a competency assessment where the trainee has to produce the correct maps for a variety of scenarios as listed above, each within 5 minutes, to the satisfaction of their Shift Leader	 in-person training of software At first, there is a specific trainee/trainer environment and then after 4 weeks the learning continues 'on shift' with their Watch Team and overseen by their Watch Leader. At the handover from Trainer to Watch Leader a development plan is set and tracked thereafter.
• For operation of the DART buoy system, there is background reading, and study of SOPs and guidelines concerning DARTs, then the trainee works through a series of SimTutor modules and exercises, which discusses the function and operation of the DART system and its CDDS interface in great detail. Their Shift Leader then	

assesses their competence through less formal assessment and observation.	
Tests:	
WrittenIn-person observation of	
PickingExercising	
Online software where available	
National Certification - do you have a formal certification, or r	not? how long? how to re-certify?
Internal certification only	Internal validation process only.
• After completion of their initial training, each Analyst has to recertify every year, to prove ongoing competence and prevent skill fade. This involves completing a TOAST competency assessment (similar to the one conducted during initial training) twice a year, and also carrying out a range of DART buoy operations	 When deemed ready by the Watch Leader, the staff will go through a validation process consisting of two supervised drills. Areas in need of further development areas are noted and resolved.
• Regular exercises/drills	 Once validated in one subfunction (Publisher or Intelligence), the Watch Officer will then begin development/training for the other subfunction, repeating the validation process.
	Regular exercises/drills

A couple of other points that might be relevant:

- Both parties also fill these duties for other hazards (volcanic activity, landslides, earthquake) and NEMA also plays a role in severe weather response therefore the NTWC is not solely a Tsunami-focussed facility
- The NEMA Monitoring, Alerting and Reporting (MAR) Centre has a three-person Watch Team comprising a Watch Leader, Watch Officer (Publishing) and Watch Officer (Intelligence). The GNS NGMC runs a three to four person team, including a Shift Leader.

I hope this is what you were looking for.

Thanks Lara

Lara Bland Principal Advisor, Hazard Risk Management | Risk & Recovery Unit National Emergency Management Agency Te Rākau Whakamarumaru Direct Dial: 04 831 4803 | Mobile: +64 27 230 8383 | www.civildefence.govt.nz TSB House, 147 Lambton Quay | PO Box 5010, Wellington 6140, New Zealand Emergencies can happen any time, anywhere. You can take steps to be prepared

Operational Competency Requirements for PTWC Watchstanders (version 2016)

Distant Events:

- 1. Recognize pager messages for distant events
- 2. Quickly, and with sufficient accuracy, determine the earthquake location, depth, and magnitude
- 3. Know which TWC is authoritative for any earthquake location and how the earthquake parameters are coordinated between TWCs for messages.
- 4. Know the criteria for each type of message product (information, watch, warning, advisory) for each ocean basin (Pacific, Indian, Caribbean) and for Hawaii.
- 5. Know how to issue messages, including checking that they were transmitted, and manually retransmitting them if necessary.
- 6. Know how to check the website and correct it if necessary.
- 7. Know how to execute the call down list for each ocean basin, including contacting threatened countries when necessary.
- 8. Know how to confirm and evaluate a tsunami with all available information, including getting additional seismic data, accessing and measuring sea level data, reviewing historical data, running the Whitmore and SIFT models, monitoring news reports, and getting reports from countries.
- 9. Know procedures for issuing supplemental messages, including cancellations.
- 10. Know how to deal with media inquiries.
- 11. Know how to deal with other telephone inquiries (public, country, NOAA, NWS).
- 12. Know the role of the WFOs and how to interact with them.
- 13. Know how to interact with Hawaii State and County Civil Defense Agencies.
- 14. Know how to operate as the backup for WC/ATWC.
- 15. Know the follow-up activities paper file, significant event report, timeline, saving sea level data, etc.

Hawaii Events

- 1. Recognize pager messages for Hawaii events.
- 2. Know when to issue a heads-up message
- 3. Quickly and accurately determine the earthquake location, depth, and magnitude.
- 4. Know the criteria for each type of message product (information or warning) and which counties each applies to.
- 5. Know how to issue messages, including checking that they were transmitted, and manually retransmitting them if necessary.
- 6. Know how to check the website and correct it if necessary.
- 7. Know how to execute the call down list for a local event.
- 8. Know how to confirm and evaluate a local tsunami with all available information.
- 9. Know procedures for issuing supplemental messages, including cancellations.
- 10. Know how to deal with media inquiries.
- 11. Know how to deal with other telephone inquiries (public, state and counties, NOAA, NWS).
- 12. Know the role of the HFO for a local event and how to interact with the HFO.
- 13. Know how to interact with Hawaii State and County Civil Defense.

14. Know the follow-up activities – paper file, significant event report, timeline, saving sea level data, etc.

Additional Competencies for Senior Watchstanders

- 1. Have strategy for assigning operational tasks to duty staff during events
- 2. Know how to collect information and make decisions regarding products, especially warnings and cancellations

Specific Process Competencies:

- 1. TeleEQ
- 2. LocalEQ
- 3. nquake
 - a. location
 - b. depth
 - c. map
 - d. historical data
 - e. observatory message
- 4. wneic
- 5. pick
 - a. P
 - b. Pp
 - c. Hypocenter
- 6. Mwp
- 7. SMAG
- 8. PMAG
- 9. Mm
- 10. Theta
- 11. tttool
- 12. tsueta
- 13. Messaging Software
 - a. pacbul
 - b. indbul
 - c. carbul
 - d. hawaii
- 14. Watertool
- 15. Tide Station Interface (TSI)
- 16. Web Interface to Trigger DARTs
- 17. Whitmore model
- 18. SIFT
- 19. WC/ATWC Messaging

PTWC Lead Watchstander Assessment

Version of 12/8/2009

The purpose of these questions is to test a watchstander's knowledge of PTWC procedures and systems to make sure they are ready to accept and carry out the responsibilities of a lead watchstander. The results of the examination should also illuminate areas of weakness which can be remedied by further study.

Part 1: Procedures

A. Local (Hawaii) Events

- a. How does a watchstander know that a local earthquake requires some official response from the PTWC? Explain the rationale for this.
- b. If an official response is required, what is the first thing the watchstander should do?
- c. Describe the steps needed to determine the hypocenter and magnitude of a local event.
- d. Summarize what procedure should be followed for an earthquake on the Big Island with a magnitude of 6.0?
- e. Summarize what procedure should be followed for an earthquake on the Big Island with a magnitude of 7.0?
- f. Is a conference call with State Civil Defense needed?

- g. How would your answer to "d" change if the earthquake occurred near Maui?
- h. How would your answer to "e" change if the earthquake occurred near Maui?
- i. Describe how depth and location (offshore or inland) affect which product is issued.
- j. Under what conditions would the entire state of Hawaii be placed in a warning with the initial PTWC message?
- k. You have issued an initial limited warning to the state of Hawaii for an earthquake on the Big Island. What conditions would cause you to upgrade to a State-wide Warning?
- 1. Same as question k, but you initially issued a Tsunami Information Statement instead.
- m. You have issued a Urgent Local Tsunami Warning to Hawaii. Under what conditions do you cancel the warning?

B. Pacific Events

a. List seven situations in terms of earthquake magnitude, depth and location for issuing Tsunami Information Bulletin to the Pacific.

- b. Explain the difference in criteria between a Fixed Regional Tsunami Warning and an Expanding Tsunami Warning and Watch.
- c. What area is covered by a Fixed Regional Tsunami Warning?
- d. What area is covered by an Expanding Regional Tsunami Warning and Watch?
- e. Explain the rationale for having the Fixed Tsunami Regional Warning product.
- f. A TIB is issued to the Pacific for a shallow underwater earthquake. What can you say about the earthquake's magnitude and location? What does it say in the evaluation section?
- g. A Pacific Basin Earthquake (outside of Hawaii) has occurred. List the conditions under which a Tsunami Advisory Bulletin is issued to the State of Hawaii.
- h. A Pacific Basin Earthquake (outside of Hawaii) has occurred. List the conditions under which the State of Hawaii is placed in a Watch.
- i. You have just issued a Tsunami Warning Bulletin to the Pacific Basin. Write an outline of the contents of the bulletin including all headers for the international Bulletin. What does it say in the evaluation section?
- j. Describe the region of the Pacific for which WC/ATWC has the primary resoponsibility for the earthquake parameters.

- k. Describe the region of the Pacific for which JMA has the primary responsibility for the earthquake parameters.
- 1. A Pacific Basin earthquake has just occurred. Under what conditions do we coordinate with WC/ATWC? Under what conditions do we coordinate with JMA? How do we coordinate with JMA?
- m. A Magnitude 7.0 earthquake occurs off of the west coast of Oregon. What is PTWC's procedure in this case? What type of Bulletin does PTWC issue internationally and to the State of Hawaii? What is Alaska's procedure in this case?
- n. A Magnitude 7.5 earthquake occurs off of the west coast of Oregon. What is PTWC's procedure in this case? What type of Bulletin does PTWC issue internationally and to the State of Hawaii? What is Alaska's procedure in this case?
- 0.
- p. Under what conditions should a Pacific-Wide Tsunami Warning Bulletin be the initial bulletin issued?
- q. You have previously issued a TIB. List three scenarios under which you would elevate the TIB to a Fixed Tsunami Regional Warning. Are their any scenarios in which a TIB could be upgraded to an Expanding Regional Warning?

- r. What is the maximum time that should elapse between the issuing of supplemental international bulletins? You can issue supplemental bulletins more frequently than going by the clock. List conditions that would lead you to do that.
- s. When should a conference call with the State Civil Defense and its Tsunami Advisors be initiated?
- t. You have issued a Pacific Regional Tsunami Warning and Watch for your initial bulletin. List three scenarios depending on wave height data or other information (or lack thereof) as to what bulletin may need to be issued next.
- u. Under what conditions should a Pacific warning be cancelled?
- v. By what time must a decision to issue a Warning to the State of Hawaii be made for a Pacific Basin event outside of Hawaii?
- w. You have issued a Tsunami Warning Bulletin for the Pacific. Who or what should get called?
- x. Under what circumstances is it necessary to notify NWS Headquarters regarding an event?
- y. A second earthquake has occurred. How do you handle two earthquakes in ops?

- z. You have issued an Expanding Tsunami Warning and Watch to the Pacific for a large earthquake in the Southwest Pacific. On the basis of the geography and available data, i.e., Dart and/or coastal tide gauge data, you conclude that the tsunami presents no danger to the Northwest Pacific, what action might you take with respect to the Warning Bulletin?
- aa. In the context of Tsunami Warning, what is considered a deep earthquake without the potential to generate a significant tsunami?
- bb. A shallow earthquake with a magnitude of 7.4 has occurred off the coast of Oregon. Twelve minutes have elapsed and you have not seen ATWC's bulletin. Describe what you should do.

C. Indian Ocean Events

- a. List the four type of bulletins issued to the Indian Ocean and the criteria for issuing them.
- b. Under what conditions is the U.S. State Department contacted?
- c. You have issued a Regional Tsunami Watch Bulletin for an Indian Ocean event. What will it say in the evaluation section?
- d. Why is there no official warning product for the Indian Ocean?
- e. Who is our primary backup for the Indian Ocean?

f. A large earthquake happens in the Andaman Islands. Give the most probable sequence of events starting with the earthquake itself leading up to issuing the first bulletin.

D. Caribbean / Atlantic Events

- a. Describe PTWC's and WC/ATWC's AOR in the Caribbean and Atlantic.
- b. An earthquake with a magnitude of 7.7 occurs on the Ascension fracture zone. What type of official message product is issued by PTWC?
- c. An earthquake with a magnitude of 6.6 occurs off the coast of Puerto Rico. Describe PTWC procedures for such an event.
- d. An earthquake with a magnitude of 8.1 occurs in the South Sandwich Arc. Describe PTWC procedures for such an event.
- e. An earthquake with a magnitude of 7.0 occurs in the Caribbean Basin. Describe PTWC procedures for such an event.

Part 2. Earthquake Processing

A. Local Events

- a. Describe the nature and origin of SPLERT's pick streams.
- b. What program lists the last 50 or so hypocenters generated by SPLERT?

- c. What two systems contribute hypocenters to the above program?
- d. On what basis do you select a hypocenter from the aforementioned list?
- e. Name three broadbands on the Big Island that PTWC receives data from.
- f. What is the name of the program that executes the interactive local magnitude calculations? What type of magnitudes does it calculate?
- g. A large local earthquake has occurred. SPLERT is not working. How do you generate a hypocenter and compute a magnitude?
- h. What is pMag? Of what use is it in operations?
- i. What program is run to ascertain SPLERT's status?
- j. SPLERT has a problem. You shut it down with what program? You restart it with what program? If you don't know offhand the name of the program that starts SPLERT, how would you go about finding it?
- k. How do you check the latency of the local seismic streams?

1. PTWC is missing local data on both loading docks. How do you figure out whether the problem is the PDC link or the Crest link? Once you figure out which link is down, what do you do next? (Note: Make believe Stuart W. or Nathan are far, far away.)

B. Teleseismic Events

- a. On what systems is the teleseismic picker running?
- b. In what workspace is the associator running? Within what suite of software is it running?
- c. The program ______ takes hypocenters from the ______ and writes them to a file.
- d. Clicking on the Tele-Eq GUI results in what actions?
- e. nquake gets its picks from the files ______ and _____. Nquake gets station information from what file?
- f. You have received picks from our automatic solutions. You notice that the wneic program shows that NEIC has developed a preliminary location. How would you combine the automatic/manual picks with NEIC's picks? By the way, when is the wneic started? How can you start it manually?
- g. You just made a number of manual picks. Somebody else clicked on an automatic solution. What problem might this cause?

- h. The PICK GUI has what inputable fields? What affect do they each have on PICK? What location program does PICK execute? How do you make a pP pick on the pick GUI?
- i. What are the three curves on a Mwp station plot? What is the best guideline for picking a magnitude on the Mwp station plot?
- j. Describe the clickable functions on the SMAG, MM and BMAG GUIs. How do you write their respective magnitudes to the COMF file? What does "PEND" mean next to a station name? "COMP" ?
- k. What is Theta? Describe the elements of the Theta graph. How can theta be used in operations?
- 1. BMAG exceeds SMAG by .5 units. What can you say about the earthquake with some degree of confidence?
- m. Where do you go to get an idea of what seismic data outages exist (if any)?
- n. Somebody pulled the plug on a loading dock. The system has come back up. What must you do to bring that loading dock completely back to life so that all of the available data is being funneled to the twseis computers?
- o. How many DigitalAlarm programs are running on each system? What is their function?

- p. What 4 curves are present on the MM graph? What guidelines do you use for picking a good Mantle Magnitude? What would indicate a slow earthquake on the MM graph?
- q. How do you send an observatory message? How do you issue a QDDS revision or retraction?
- r. Four curves are plotted on the MM GUI graph. What are they? A slow earthquake occurs. What do you suppose the MM GUI graph would look like?
- s. How do you add or delete a channel to a Sentinel?
- t. A. seismic station is imported from NEIC only to ewb. Explain how this station eventually winds up for use on both lulu and kaku. Name and state the softwares involved and what they do.
- u. What is NEXUS?
- v. Give 5 station codes for broadbands in the Western Pacific, Caribbean, South America, Indian Ocean, Western US. The stations must be ones currently received by the PTWC.

Part 3. Sea-level Processing / Tsunami Forecasting

A. Watertool/Tide Tool/Coastal Gauges/DARTs

a. PTWC acquires GTS data how and from where? Where is it logged?

- b. Tide Tool requires 4 files (I'm not proud of that by the way). Can you name them? Ok, can you name any of them?
- c. How do you startup Watertool?
- d. What are the mouse clickable functions on the Watertool display widget? (They are the same for Tide Tool)
- e. You are told that the GTS feed will be interrupted for a period of time. What backup (imperfect though it may be) do we have? (Hint: It is in the One GUI) Where does this backup get the data from? What else can we do to get sea-level information?
- f. Name three agencies outside of the US that contribute sea-level data over the GTS.
- g. How do you record tsunami wave parameters with Watertool? What are the parameters that can be recorded? Bonus question: Where are those parameters recorded?
- h. You're not sure to what extent a sea-level station has open access to the ocean or in what direction the mouth of the harbor is facing. How do you find out using Watertool?
- i. PTWC receives sea-level data from sources other than GTS. How does local, realtime sea-level get ingested into our system? Foreign near real-time sea-level data?

- j. What are the advantages and disadvantages of coastal sea level gauges versus deep ocean gauges for detecting and measuring tsunamis and for forecasting tsunami impacts?
- k. What is the range of periods for tsunami waves? What might the period of a tsunami wave be indicative of?
- 1. What is a DART and what does the acronym DART stand for? What organization developed the DART? What organization is responsible for deploying and maintaining the DARTs?
- m. The DART system has two modes of transmission, standard and trigger mode. In the standard mode, what is the sampling interval? What is the transmission interval?
- n. In DART trigger mode there are three different transmission intervals. What are they, and what is the sampling mode and number of data in each? Once triggered, how long does a DART stay in trigger mode?
- o. Describe how to manually put a DART into trigger mode (at least two ways). What constraints are there? Why don't we test manual triggering frequently?
- p. How might a DART otherwise go into trigger mode (two ways). What is the most common way that a DART is triggered (not considering internal technical problems).

- q. Describe what you can about the size of a tsunami signal on a DART gauge. What size signal do you think might indicate a destructive teletsunami?
- r.

B. Travel Times / Whitmore Model / SIFT

- a. What are two ways tsunami travel-times can be computed on the PTWC system?
- b. Describe the limitations/weaknesses of PTWC's travel times in how they are calculated and how they might be used.
- c. When should you compute travel-times?
- d. Which method creates a map? Which is the preferred method used to generate travel-times for bulletins?
- e. Because both methods for generating travel-times write to the same file, what do you need to be careful about?
- f. Tsunami travel-time are computed for sea-level station locations and for ______ locations.
- g. Where can you find the location information used in travel-time computations?

- h. How can you start either of the two methods?
- i. Describe in principle how the Whitmore forecast model works.
- j. Where do you find the Whitmore model in PTWC operations?
- k. For what coastal locations does the Whitmore model make a forecast (general answer)?
- 1. How do you constrain the Whitmore model with the seismic parameters and sea level data?
- m. What does the acronym SIFT stand for?
- n. How does SIFT work? I'm just looking for the most basic description from entering eq information to execution and presenting results.
- o. SIFT has a number of GUIs. Can you name four and state the purpose for each?
- p. What products does SIFT produce?

- q. On the main map with all of the layers that SIFT produces for each simulation, describe as many of the features plotted on this map as you can. What mouse clickable functions can you perform on the map?
- r. You decide you need to adjust the source parameters used for the simulation. How do you do it? How do you bring up the GUI that allows you to do the adjusting? What can you adjust?
- s. Describe the GUI that lists the maximum wave heights for each location in the database. What is this GUI titled? What mouse clickable functions can be performed?
- t. You notice that SIFT tended to grossly underestimate the wave hights observed at the DART buoys. What might you consider doing with respect to forecasts for coastal areas?

Part 4. Messaging Details

A. Messaging Software

- a. List the names of the four messaging software programs PTWC uses to send official bulletins? List three ways they may be invoked.
- b. For teleseismic events, list all of the communication pathways over which a bulletin is sent from PTWC for A) a Pacific event B) an Indian Ocean event, and C) a Caribbean Event.
- c. How can a watchstander make sure that a product was successfully issued via each communication pathway?

- d. What program updates the website?
- e. PTWC utilizes the GTS of the WMO as its primary recommended method to communicate its products internationally. What do the acronyms GTS and WMO stand for?
- f. PTWC products have unique WMO Product IDs. Can you name any of them and what products they correspond to?
- g. What is the four letter code in all of PTWC's WMO Product IDs that indicates the product came from PTWC? What do each of those four letters represent?
- h. How are PTWC products disseminated domestically? For example, how do they get to the Honolulu forecast office? How do they get to the media?
- i. In the software for issuing products to the State of Hawaii, there are two main categories of product choices in the main menu. What are those two categories?
- j. How are the Hawaii products from PTWC
- k. What program composes the Observatory message?
- 1. You need to edit a bulletin. How do you do that?

- m. The last pop-up for the observatory message comes with 4 options. What are they? Explain what course of action each option leads to.
- n. Why should you never edit the hypocenter parameters in an observatory message?
- o. Is the lettering in a Bulletin case sensitive? What case? What are the only punctuation marks you should ever use?
- p. Because they have a local earthquake problem, but no local tsunami warning system, which US territories will key off of our observatory message.

B. Circuits

- a. What does AFTN stand for? GTS? IDN?
- b. Which messaging circuits are only available in the US?
- c. What circuits involve communications through the Port-Servers?
- d. The sending of test messages on the GTS fails, however, we are receiving messages. What are the possible causes? How do you troubleshoot?
- e. The AFTN computer crashed. How do you restart the AFTN? By now, you should know the procedure by heart.

- f. Restarting the AFTN doesn't fix the problem, who do you call and where do you find the number?
- g. The socket-2-socket software that handles the GTS data, receives the data from where? This software is comprised of two programs; the one that receives the data is called ______ runs on the computers ______ and _____, and listens on what port #? The program that sends messages from PTWC to ______ is called ?
- h. Describe the functions of the FAA, GTS and NWW logging windows.
- i. Faxes are sent how?
- j. How do you update the FAX list?

Part 5. Event Management

- a. Describe the types of information available on the plasma display?
- b. On what types of information would you base your decision to cancel a warning or upgrade a warning?
- c. Describe your general approach to handling the media and questions from the media during warning events.

- d. Describe your general approach to interacting with Hawaii Civil Defense during warning events.
- e. When would you call in other watchstanders to help during events? What assignments would you make to the other watchstanders?
- f. What other parts of our own organization (NOAA, NWS) might we interact with during events and why?
- g. As lead, what will be your main areas of concern during events? What do you need to monitor and ensure it gets done?
- h. Describe activities that need to be done after a warning event?

US National Tsunami Warning Center (2016) (formerly West Coast and Alaska Tsunami Warning Center, WC/ATWC)

Tsunami Duty Scientist training plan (WC/ATWC version)

NOTE: Sections 0-5 are common to both PTWC and WC/ATWC. Sections 6-11 have some items which are unique to each center.

Goal: To prepare new personnel for shift or standby duty at a Tsunami Warning Center

Instruction:

Sections will be taught either by existing personnel who are focal points for that subject, by invited experts, or be self-taught from reference material. The TWC Video-Teleconferencing Equipment will be used to connect training sessions as appropriate.

Validation:

Each TWC director or Tsunami Warning Science Officer will certify the new personnel have completed all aspects of the training and demonstrated their competency prior to the start of operational duty.

Section 0: New Employee Training

- 1. IT Security
- 2. Government vehicle use
- 3. Purchasing
- 4. Travel (travel card)
- 5. Duty hours
- 6. Ethics, etc.

New employee training completed

Section 1: Facility Orientation

- 1. Building security
- 2. Fire alarms
- 3. Emergency Action Plan
- 4. Disaster Preparedness Plan
- 5. Mechanical systems
- 6. Safety/environmental briefing

_____ Facility orientation training completed

Section 2: The Tsunami Warning System

- 1. History
- 2. Mission
- 3. Components
 - a. The TWCs
 - b. Communications
 - c. Emergency Response Agencies
 - d. Research
 - e. Outreach and education
- 4. Organizational Structure
 - a. Dept. of Commerce
 - i. NOAA/NWS
 - ii. NWS Regions

- b. UNESCO/IOC/ICG/ITSU-IOTWS
- c. NTHMP
- d. TTRC
- 5. TWS Partners
 - a. NOAA
 - i. PMEL
 - ii. NESDIS
 - iii. NGDC
 - iv. NOS
 - v. NWS-WFOs
 - vi. Joint Institutes
 - b. Emergency Management
 - i. FÉMA
 - ii. State Agencies
 - iii. County/Local Agencies
 - c. USGS
 - i. NEIS
 - ii. Volcano Observatories
 - iii. CREST
 - iv. Regional Networks
 - d. IRIS
 - e. FEMA
 - f. IOC/GLOSS
 - g. GEOSS
 - ň. TWEAK
 - i. Universities
 - j. Professional Societies

Tsunami Warning System organization training completed

Section 3: Earthquakes 101

- 1. Basics
 - a. Fault sources and types
 - b. Plate tectonics
 - c. Wave types and properties
 - d. Phases and earth interior
 - e. Location/magnitude basics
 - i. Location techniques
 - 1. WC/ATWC
 - 2. Local/regional methods
 - ii. Associators
 - iii. Magnitudes
 - 1. MI
 - 2. MI (WC/ATWC)
 - 3. Md
 - 4. Mb
 - 5. Ms
 - 6. Mw
 - 7. Mwp
 - 8. Mm
 - 9. New techniques
 - f. Fault plane solutions
 - g. Synthetic seismograms
 - h. Inverse models
 - i. CMT

- ii. Finite fault models
- i. Strong motion seismology and shake maps
- 2. Seismogram Interpretation
- 3. Important Historic Earthquakes
- 4. Earthquake Prediction/Seismic gap hypothesis
- 5. Signal Processing
 - a. Digitization Nyquist frequencies
 - b. Convolutions/Correlations
 - c. Filtering
 - d. Spectral analysis

Basic seismology training completed and competency demonstrated

Section 4: Tsunami 101

- 1. Tsunami Generation
 - a. Mechanisms
 - i. Earthquakes
 - 1. Magnitude influence
 - 2. Depth influence
 - 3. Focal Mechanism
 - 4. Slip Distribution
 - 5. "Slow" Earthquakes
 - 6. Static displacement formulae
 - ii. Landslides/Slumps
 - iii. Volcanoes
 - iv. Meteor Impacts
 - b. Source Zones
 - i. Pacific Basin
 - ii. Pacific Marginal Seas
 - 1. Bering Sea
 - 2. Sea of Japan
 - 3. South China Sea
 - 4. Indonesia Seas
 - 5. Tasman Sea
 - iii. Indian Ocean
 - iv. Caribbean Sea
 - v. Atlantic Ocean
 - vi. Mediterranean Sea
 - c. Source Characteristics
 - i. Wave Period
 - ii. Directionality
 - iii. Size
 - iv. Complexity
 - 1. Slip Distribution
 - 2. Segmentation
 - 3. Water Depth
 - 4. Land masses
- 2. Wave propagation
 - a. Speed
 - b. Amplitude
 - i. Deep Ocean
 - ii. Spreading
 - iii. Bathymetric focusing
 - iv. Reflections
 - v. Barriers

- 1. Continents
- 2. Islands
- 3. Island Chains
- vi. Attenuation
- c. Currents
- d. Dispersion
- e. Number of Waves
- 3. Shoreline Impact
 - a. Range of Impacts
 - b. Islands
 - i. Wrap Around
 - ii. Multiple Waves
 - iii. Edge Waves
 - 1. Islands
 - 2. Continental Shelf
 - c. Local resonance
- 4. Wave Observations
 - a. Tide gage records
 - b. DART records
 - c. Altimetry records
 - d. Video/Photo
- 5. Long wave theory
- 6. Hydro-dynamic equations of motion and continuity
- 7. Modeling basics
 - a. Finite difference approach
 - b. Source definition
 - i. Earthquake
 - ii. Landslide
 - c. Propagation terms in equations
 - d. Inundation
 - e. Other approaches finite element, scale models, 3D volume of fluid
- 8. Tsunami travel times
 - a. Equation derivation
 - b. WC/ATWC technique
- 9. Tide prediction
 - a. Basics
 - b. Techniques
- 10. Bathymetric data
 - a. NGDC
 - b. TIME center
 - c. Other sources
- 11. Tsunami History
 - a. US Pacific
 - b. Rest of Pacific
 - c. US Atlantic
 - d. Rest of Atlantic
 - e. Indian O.
 - f. Caribbean
 - g. Other
- 12. Paleotsunami studies
- 13. Historical tsunami data bases

Tsunami science training completed and competency demonstrated (1-9)

____ Historical tsunami training completed (10-12)

Section 5: Data acquisition

- 1. Seismometry
 - a. Seismometer principles
 - b. History of the instruments
 - c. Types:
 - i. Short period
 - ii. Long period
 - iii. Broadband
 - 1. Operating Principles
 - 2. Models
 - iv. Strong motion
 - 1. Operating Principles
 - 2. Models
 - d. Seismometer installations
 - i. Vault design principles
 - ii. Vault construction
 - e. Seismic digitizers
 - i. Principles
 - ii. Models
 - f. Instrument Response
 - i. Response basics
 - ii. Complex representations
 - iii. Application of response to data
 - iv. Dataless SEED files
- 2. Seismic data transmission and system operation
 - a. Analog
 - b. Digital
 - i. VSAT
 - ii. Satellite Internet
 - iii. Leased Line
 - iv. Internet
 - c. Seismic lab interconnections (Crestnet, Internet)
- 3. Seismic Networks
 - a. WC/ATWC
 - b. PTWC
 - c. TWC cooperating networks
- 4. Sea Level
 - a. Coastal gages
 - i. Basics
 - ii. Types
 - 1. Bubbler
 - 2. Float
 - 3. Sonic
 - 4. Radar
 - 5. Pressure transducer
 - iii. Frequency response
 - iv. Data transmission
 - 1. Different options
 - 2. Paths to TWC
 - v. Networks
 - b. Deep Ocean Pressure Sensors
 - i. Basics
 - ii. Pressure sensor
 - iii. Surface buoy
 - iv. Dart 1/2 designs

- v. Data transmission
- 5. Other data
 - a. Satellite altimetry
 - b. GPS

_ Data acquisition training completed and competency demonstrated

Section 6: Data Processing

- 1. Seismic Analysis
 - a. TWC data processing history and background
 - b. Earthworm platform and ring structure
 - c. Signal acquisition and transmission format
 - i. Naqs2ew, for example
 - ii. Import/export
 - iii. Ring2coax
 - d. Earlybird: Overall architecture and interconnectivity
 - e. Disk writing format
 - f. P-picking and Alarms
 - i. Single Station
 - ii. Regional
 - g. Earthquake locations and associations
 - i. Hands-on training with EarlyBird
 - ii. Special tips and techniques
 - h. Magnitudes and mechanisms
 - i. Ml
 - ii. Mb
 - iii. Ms
 - iv. Mw
 - v. Mwp
 - vi. Mm

i.

- vii. NEIC CMT
- i. Alarm types and notifications
 - **Graphical Interfaces**
 - i. Develo
 - ii. LPProc
 - iii. Hypo_display
 - iv. Mm
 - v. NEICCMT
 - vi. Latency monitor
 - vii. Analyze
 - viii. Locate
 - ix. Summary
 - x. Messages
- k. Other centers' parameters
 - i. CISN Display
 - ii. RegionVu
 - iii. NADIN2
 - iv. Others NEIC, HRV, AEIC, etc.
- 2. Geographical Information System
 - a. EarthVu
 - i. Connectivity with EarlyBird
 - ii. Overlays
 - 1. Historical Data Bases
 - 2. Others
 - iii. Options

- iv. CloseVu
- v. RegionVu
- vi. TTVu
- vii. WebVu
- b. Web site updates
- 3. Sea level processing
 - a. Signal acquisition
 - b. Filtering
 - c. Tide prediction
 - d. Display programs
 - e. DART alarms
 - f. Dial-up backup
 - g. After-event data retrieval
- 4. Tsunami modeling software
 - a. Present forecasting method
 - i. Data base
 - ii. Application during events
 - iii. Pros and cons
 - b. Upgraded local methods
 - i. Application to IOT
 - ii. Future applications
 - c. PMEL SIFT
 - i. Background
 - ii. Application during event
- 5. Tsunami Travel time software
 - a. Travel time data bases and their creation
 - b. Software description
- 6. Miscellaneous routines
 - a. TsunamiWatcher
 - b. QDDS
 - c. Daily SEISMO evalutations
 - d. Others
- 7. System startup and reboot procedures

Competency demonstrated in all aspects of TWC data processing

_____ 200+ events have been post-processed (WC/ATWC)

_____ 50+ events have been processed in real-time (WC/ATWC)

Section 7: Procedures

- 1. Directives
- 2. Area-of-Responsibility
 - a. Breakpoints
 - b. ETA points
- 3. Communications Plan (ITSU/IOTWS)
- 4. Operations Manuals (PTWC-WC/ATWC)
- 5. Thresholds
 - a. Atlantic
 - b. Pacific
 - c. Indian Ocean
- 6. Event flowcharts
- 7. Notification lists
- 8. Instructions
 - a. Ops manual

- b. Hypocenter Summary
- c. Printed message header
- 9. Performance Goals
- 10. Backup activation
 - a. PTWC procedures
 - b. Notifying PTWC backup is necessary

_____ Tsunami Warning Center procedures are mastered

_____ Scenarios have been practiced for all areas within the area-of-responsibility

Section 8: Products

- 1. Atlantic
- 2. Pacific
- 3. PTWC
- 4. "Public"
- 5. Web-based
- 6. NWS format
- 7. UG codes
- 8. VTEC
- 9. QDDS

TWC products training completed and competency demonstrated

Section 9: Message dissemination

- 1. Primary
 - a. NWWS
 - b. NADIN2
 - c. NWSTG Line 225
 - d. NAWAS
- 2. Secondary
 - a. Email
 - b. Pager
 - c. VHF radio
 - d. Web page
 - e. TsunamiWatcher
 - f. Phone lists
 - g. Fax service
 - h. CISN Display
 - i. Satellite phone
- 3. Communication tests
- 4. Retractions, manual web updates, etc.
- 5. AWIPS
- 6. MILITARY

Message dissemination training completed and competency demonstrated

Section 10: IT Architecture

- 1. Overall plan
- 2. Internet access
 - a. MTA
 - b. MPLS
 - c. Starband

- 3. Crestnet
- 4. Local seismic network communications
- 5. Message dissemination communications
- 6. System and personal backups
- 7. Security
 - a. IT Security plan
 - b. Harris
 - c. Firewall protection/logging

_____ IT architecture training completed

Section 11: Outreach and TsunamiReady

- 1. Weekly open houses
 - a. Powerpoint presentations
 - b. Rotation
- 2. External speaking
- 3. Dealing with the media
- 4. Community visits
 - a. Normal protocol
 - b. Partners
- 5. TsunamiReady
 - a. History
 - b. Basis
 - c. Criteria
 - d. Communities attaining recognition and those near
 - e. Tsunami strengthening plan enhancements

Outreach and TsunamiReady training completed

Tsunami Training requirements for Meteorology and Coast Radio Staff (version 2016)

No	Basic Theory (COMET online course done locally)	No	Specialized Training (local/overseas)	No	Competencies (on the job – local and overseas)
1	Tsunamis (1.5 – 2hr)	1	Early Warning and Alert Systems	1	Demonstrated knowledge of Tonga Met Service Forecast, Alert and Early Warning System (Local)
2	Tsunami Warning System (1 – 1.25hr)	2	Tsunami Standard Operating Procedures	2	Demonstrated knowledge of PTWC Tsunami Products and Services
3	Near Shore Wave Modeling (1 – 1.25)	3	Communication of Tsunami Information	3	Demonstrated knowledge of Tonga Met Service Tsunami Procedures
4	Introductions to Ocean Tides (45min)	4	Attachment to Regional Tsunami Warning Centre's (overseas)	4	Demonstrated knowledge of Tonga GSU tsunami and earthquake procedures
5	Rip Current Forecasts (1.5 – 2hr)	5	Attachment to Geological Survey (local)	5	Demonstrated knowledge of NEMO tsunami and earthquake procedures
6	Shallow Water Waves (1 – 1.25hr)	6	Attachment to NEMO (local)	6	Demonstrated ability to disseminate tsunami warning information including dealing with media competence
7	Wave Life Cycle 1 - Generation (1 – 1.25hr)	7	Earthquake Monitoring and Tsunami Observation Systems (overseas)	7	
8	Wave Life Cycle 2 – Propagation & Dispersion (1 – 1.25hr)	8	Tsunami modeling (overseas)	8	
9	Low Level Coastal Jets (1 – 1.25hr)	9		9	
10	Wave Type and Characteristics (1 – 1.25hr)	10		10	
11		11		11	